



# TEST DATA OF DBS700B28-XCMN

Regulated DC Power Supply  
Apr 19, 2006

Approved by : Tatsuya Maeno  
Tatsuya Maeno                          Design Manager

Prepared by : Takayuki Fukuda  
Takayuki Fukuda                          Design Engineer


**COSEL CO.,LTD.**

## CONTENTS

1. Input Current (by Input Voltage) . . . . .	1
2. Input Current (by Load Current) . . . . .	2
3. Input Power (by Load Current) . . . . .	3
4. Efficiency (by Input Voltage) . . . . .	4
5. Efficiency (by Load Current) . . . . .	5
6. Line Regulation . . . . .	6
7. Load Regulation . . . . .	7
8. Dynamic Load Response . . . . .	8
9. Ripple Voltage (by Load Current) . . . . .	9
10. Ripple-Noise . . . . .	10
11. Ripple Voltage (by Ambient Temperature) . . . . .	11
12. Ambient Temperature Drift . . . . .	12
13. Output Voltage Accuracy . . . . .	13
14. Time Lapse Drift . . . . .	14
15. Rise and Fall Time . . . . .	15
16. Minimum Input Voltage for Regulated Output Voltage . . . . .	16
17. Overcurrent Protection . . . . .	17
18. Overvoltage Protection . . . . .	18
19. Figure of Testing Circuitry . . . . .	19

(Final Page 19)

Model	DBS700B28-XCMN	Temperature	25°C																																																																															
Item	Input Current (by Input Voltage)	Testing Circuitry	Figure A																																																																															
Object	_____																																																																																	
1.Graph		2.Values																																																																																
<p>The graph plots Input Current [A] on the y-axis (0 to 5) against Input Voltage [V] on the x-axis (0 to 500). Three curves are shown: Load 100% (triangles), Load 50% (squares), and Load 0% (circles). All curves show a decreasing trend. A slanted line is drawn through the origin, representing the rated input voltage range.</p>		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>50</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>100</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>150</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>170</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>180</td><td>0.029</td><td>2.142</td><td>4.242</td></tr> <tr><td>200</td><td>0.027</td><td>1.926</td><td>3.812</td></tr> <tr><td>250</td><td>0.024</td><td>1.549</td><td>3.058</td></tr> <tr><td>300</td><td>0.023</td><td>1.305</td><td>2.568</td></tr> <tr><td>350</td><td>0.024</td><td>1.135</td><td>2.224</td></tr> <tr><td>400</td><td>0.024</td><td>1.009</td><td>1.966</td></tr> <tr><td>420</td><td>0.025</td><td>0.967</td><td>1.882</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	50	0.000	0.000	0.000	100	0.000	0.000	0.000	150	0.000	0.000	0.000	170	0.000	0.000	0.000	180	0.029	2.142	4.242	200	0.027	1.926	3.812	250	0.024	1.549	3.058	300	0.023	1.305	2.568	350	0.024	1.135	2.224	400	0.024	1.009	1.966	420	0.025	0.967	1.882	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																	
	Load 0%	Load 50%	Load 100%																																																																															
0	0.000	0.000	0.000																																																																															
50	0.000	0.000	0.000																																																																															
100	0.000	0.000	0.000																																																																															
150	0.000	0.000	0.000																																																																															
170	0.000	0.000	0.000																																																																															
180	0.029	2.142	4.242																																																																															
200	0.027	1.926	3.812																																																																															
250	0.024	1.549	3.058																																																																															
300	0.023	1.305	2.568																																																																															
350	0.024	1.135	2.224																																																																															
400	0.024	1.009	1.966																																																																															
420	0.025	0.967	1.882																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
Note: Slanted line shows the range of the rated input voltage.																																																																																		

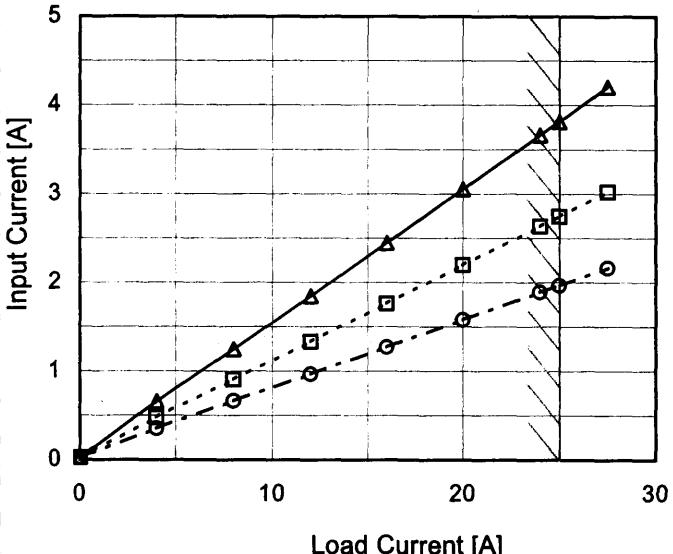
Model	DBS700B28-XCMN	Temperature Testing Circuitry	25°C																																																			
Item	Input Current (by Load Current)	Figure A																																																				
Object	_____																																																					
1.Graph		Input Volt. 200V Input Volt. 280V Input Volt. 400V																																																				
		2.Values																																																				
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr> <td>0.0</td><td>0.027</td><td>0.023</td><td>0.025</td></tr> <tr> <td>4.0</td><td>0.657</td><td>0.478</td><td>0.352</td></tr> <tr> <td>8.0</td><td>1.248</td><td>0.906</td><td>0.663</td></tr> <tr> <td>12.0</td><td>1.846</td><td>1.333</td><td>0.968</td></tr> <tr> <td>16.0</td><td>2.446</td><td>1.763</td><td>1.272</td></tr> <tr> <td>20.0</td><td>3.052</td><td>2.200</td><td>1.580</td></tr> <tr> <td>24.0</td><td>3.662</td><td>2.638</td><td>1.892</td></tr> <tr> <td>25.0</td><td>3.816</td><td>2.748</td><td>1.970</td></tr> <tr> <td>27.5</td><td>4.205</td><td>3.024</td><td>2.166</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Input Current [A]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	0.027	0.023	0.025	4.0	0.657	0.478	0.352	8.0	1.248	0.906	0.663	12.0	1.846	1.333	0.968	16.0	2.446	1.763	1.272	20.0	3.052	2.200	1.580	24.0	3.662	2.638	1.892	25.0	3.816	2.748	1.970	27.5	4.205	3.024	2.166	--	-	-	-	--	-	-	-			
Load Current [A]		Input Current [A]																																																				
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																			
0.0	0.027	0.023	0.025																																																			
4.0	0.657	0.478	0.352																																																			
8.0	1.248	0.906	0.663																																																			
12.0	1.846	1.333	0.968																																																			
16.0	2.446	1.763	1.272																																																			
20.0	3.052	2.200	1.580																																																			
24.0	3.662	2.638	1.892																																																			
25.0	3.816	2.748	1.970																																																			
27.5	4.205	3.024	2.166																																																			
--	-	-	-																																																			
--	-	-	-																																																			

Note: Slanted line shows the range of the rated load current.

Model	DBS700B28-XCMN	Temperature Testing Circuitry	25°C																																																			
Item	Input Power (by Load Current)	Figure A																																																				
Object	_____																																																					
1. Graph	<p>—△— Input Volt. 200V      - -□--- Input Volt. 280V      - -○--- Input Volt. 400V</p> <table border="1"> <caption>Data points estimated from the graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Input Power [W] (200V)</th> <th>Input Power [W] (280V)</th> <th>Input Power [W] (400V)</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.4</td><td>6.5</td><td>10.0</td></tr> <tr><td>4.0</td><td>131.3</td><td>133.7</td><td>140.6</td></tr> <tr><td>8.0</td><td>249.6</td><td>253.4</td><td>265.1</td></tr> <tr><td>12.0</td><td>369.0</td><td>373.2</td><td>387.0</td></tr> <tr><td>16.0</td><td>488.0</td><td>493.4</td><td>509.0</td></tr> <tr><td>20.0</td><td>610.0</td><td>616.0</td><td>632.0</td></tr> <tr><td>24.0</td><td>733.0</td><td>738.0</td><td>756.0</td></tr> <tr><td>25.0</td><td>763.0</td><td>769.0</td><td>787.0</td></tr> <tr><td>27.5</td><td>841.0</td><td>847.0</td><td>866.0</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Power [W] (200V)	Input Power [W] (280V)	Input Power [W] (400V)	0.0	5.4	6.5	10.0	4.0	131.3	133.7	140.6	8.0	249.6	253.4	265.1	12.0	369.0	373.2	387.0	16.0	488.0	493.4	509.0	20.0	610.0	616.0	632.0	24.0	733.0	738.0	756.0	25.0	763.0	769.0	787.0	27.5	841.0	847.0	866.0	--	-	-	-	--	-	-	-			
Load Current [A]	Input Power [W] (200V)	Input Power [W] (280V)	Input Power [W] (400V)																																																			
0.0	5.4	6.5	10.0																																																			
4.0	131.3	133.7	140.6																																																			
8.0	249.6	253.4	265.1																																																			
12.0	369.0	373.2	387.0																																																			
16.0	488.0	493.4	509.0																																																			
20.0	610.0	616.0	632.0																																																			
24.0	733.0	738.0	756.0																																																			
25.0	763.0	769.0	787.0																																																			
27.5	841.0	847.0	866.0																																																			
--	-	-	-																																																			
--	-	-	-																																																			
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.4</td><td>6.5</td><td>10.0</td></tr> <tr><td>4.0</td><td>131.3</td><td>133.7</td><td>140.6</td></tr> <tr><td>8.0</td><td>249.6</td><td>253.4</td><td>265.1</td></tr> <tr><td>12.0</td><td>369.0</td><td>373.2</td><td>387.0</td></tr> <tr><td>16.0</td><td>488.0</td><td>493.4</td><td>509.0</td></tr> <tr><td>20.0</td><td>610.0</td><td>616.0</td><td>632.0</td></tr> <tr><td>24.0</td><td>733.0</td><td>738.0</td><td>756.0</td></tr> <tr><td>25.0</td><td>763.0</td><td>769.0</td><td>787.0</td></tr> <tr><td>27.5</td><td>841.0</td><td>847.0</td><td>866.0</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	5.4	6.5	10.0	4.0	131.3	133.7	140.6	8.0	249.6	253.4	265.1	12.0	369.0	373.2	387.0	16.0	488.0	493.4	509.0	20.0	610.0	616.0	632.0	24.0	733.0	738.0	756.0	25.0	763.0	769.0	787.0	27.5	841.0	847.0	866.0	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																			
0.0	5.4	6.5	10.0																																																			
4.0	131.3	133.7	140.6																																																			
8.0	249.6	253.4	265.1																																																			
12.0	369.0	373.2	387.0																																																			
16.0	488.0	493.4	509.0																																																			
20.0	610.0	616.0	632.0																																																			
24.0	733.0	738.0	756.0																																																			
25.0	763.0	769.0	787.0																																																			
27.5	841.0	847.0	866.0																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note:	Slanted line shows the range of the rated load current.																																																					

Model	DBS700B28-XCMN	Temperature Testing Circuitry	25°C Figure A																																
Item	Efficiency (by Input Voltage)																																		
Object	_____																																		
1. Graph			2. Values																																
<p>The graph plots Efficiency [%] on the y-axis (44 to 100) against Input Voltage [V] on the x-axis (100 to 500). Two data series are shown: Load 50% (dashed line with square markers) and Load 100% (solid line with triangle markers). Both series show efficiency decreasing slightly as input voltage increases from 200V to 400V. A slanted line indicates the rated input voltage range.</p>			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>170</td> <td>-</td> <td>-</td> </tr> <tr> <td>180</td> <td>90.4</td> <td>91.0</td> </tr> <tr> <td>200</td> <td>90.6</td> <td>91.1</td> </tr> <tr> <td>240</td> <td>90.2</td> <td>90.9</td> </tr> <tr> <td>280</td> <td>89.4</td> <td>90.5</td> </tr> <tr> <td>320</td> <td>88.5</td> <td>89.8</td> </tr> <tr> <td>360</td> <td>87.4</td> <td>88.9</td> </tr> <tr> <td>400</td> <td>86.3</td> <td>88.3</td> </tr> <tr> <td>420</td> <td>85.7</td> <td>87.8</td> </tr> </tbody> </table>	Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	170	-	-	180	90.4	91.0	200	90.6	91.1	240	90.2	90.9	280	89.4	90.5	320	88.5	89.8	360	87.4	88.9	400	86.3	88.3	420	85.7	87.8
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
170	-	-																																	
180	90.4	91.0																																	
200	90.6	91.1																																	
240	90.2	90.9																																	
280	89.4	90.5																																	
320	88.5	89.8																																	
360	87.4	88.9																																	
400	86.3	88.3																																	
420	85.7	87.8																																	

Note: Slanted line shows the range of the rated input voltage.

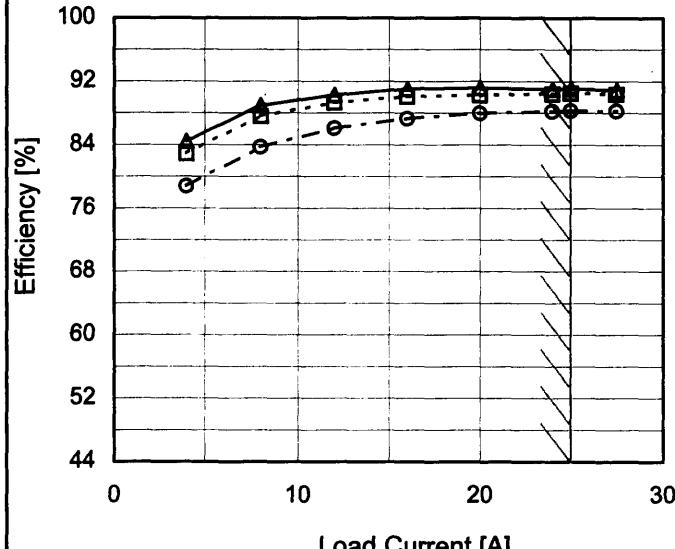Model	DBS700B28-XCMN	Temperature	25°C																																																			
Item	Efficiency (by Load Current)	Testing Circuitry	Figure A																																																			
Object	_____																																																					
1. Graph		—△— Input Volt. 200V - -□--- Input Volt. 280V - -○--- Input Volt. 400V																																																				
			2. Values																																																			
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr> <td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>4.0</td><td>84.4</td><td>82.9</td><td>78.7</td></tr> <tr> <td>8.0</td><td>89.0</td><td>87.6</td><td>83.7</td></tr> <tr> <td>12.0</td><td>90.3</td><td>89.3</td><td>86.1</td></tr> <tr> <td>16.0</td><td>91.1</td><td>90.1</td><td>87.3</td></tr> <tr> <td>20.0</td><td>91.2</td><td>90.3</td><td>88.0</td></tr> <tr> <td>24.0</td><td>91.0</td><td>90.4</td><td>88.2</td></tr> <tr> <td>25.0</td><td>91.1</td><td>90.5</td><td>88.3</td></tr> <tr> <td>27.5</td><td>90.9</td><td>90.4</td><td>88.2</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Efficiency [%]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	-	-	-	4.0	84.4	82.9	78.7	8.0	89.0	87.6	83.7	12.0	90.3	89.3	86.1	16.0	91.1	90.1	87.3	20.0	91.2	90.3	88.0	24.0	91.0	90.4	88.2	25.0	91.1	90.5	88.3	27.5	90.9	90.4	88.2	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																			
0.0	-	-	-																																																			
4.0	84.4	82.9	78.7																																																			
8.0	89.0	87.6	83.7																																																			
12.0	90.3	89.3	86.1																																																			
16.0	91.1	90.1	87.3																																																			
20.0	91.2	90.3	88.0																																																			
24.0	91.0	90.4	88.2																																																			
25.0	91.1	90.5	88.3																																																			
27.5	90.9	90.4	88.2																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

Model	DBS700B28-XCMN
Item	Line Regulation
Object	+28V25A

1. Graph

Output Voltage [V]


Input Voltage [V]

Legend: ---□--- Load 50%  
—△— Load 100%


Note: Slanted line shows the range of the rated input voltage.

Temperature Testing Circuitry	25°C	Figure A	
		Load 50%	Load 100%
170	-	-	-
180	28.074	28.057	
200	28.072	28.051	
240	28.073	28.049	
280	28.071	28.045	
320	28.070	28.041	
360	28.066	28.036	
400	28.060	28.030	
420	28.056	28.027	

2. Values

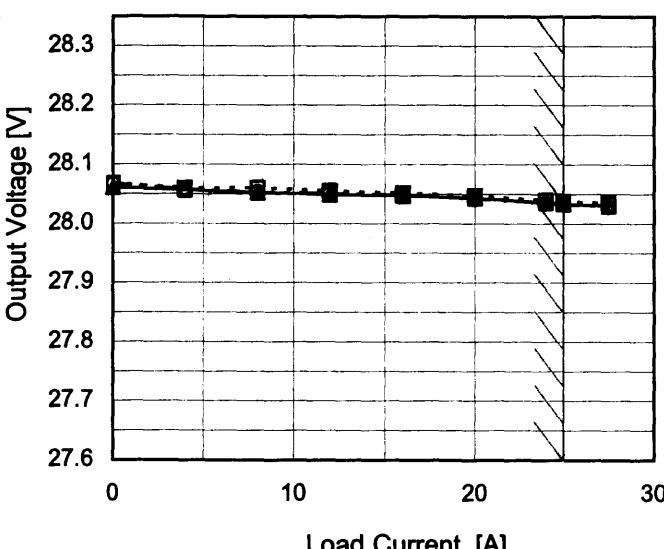Model	DBS700B28-XCMN	Temperature	25°C																																																			
Item	Load Regulation	Testing Circuitry	Figure A																																																			
Object	+28V25A																																																					
1.Graph		—△— Input Volt. 200V - -□--- Input Volt. 280V - -○--- Input Volt. 400V																																																				
		2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr> <td>0.0</td> <td>28.061</td> <td>28.068</td> <td>28.068</td> </tr> <tr> <td>4.0</td> <td>28.057</td> <td>28.060</td> <td>28.058</td> </tr> <tr> <td>8.0</td> <td>28.053</td> <td>28.060</td> <td>28.053</td> </tr> <tr> <td>12.0</td> <td>28.050</td> <td>28.055</td> <td>28.051</td> </tr> <tr> <td>16.0</td> <td>28.047</td> <td>28.052</td> <td>28.048</td> </tr> <tr> <td>20.0</td> <td>28.043</td> <td>28.047</td> <td>28.042</td> </tr> <tr> <td>24.0</td> <td>28.036</td> <td>28.040</td> <td>28.034</td> </tr> <tr> <td>25.0</td> <td>28.034</td> <td>28.038</td> <td>28.032</td> </tr> <tr> <td>27.5</td> <td>28.031</td> <td>28.034</td> <td>28.029</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		Load Current [A]	Output Voltage [V]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	28.061	28.068	28.068	4.0	28.057	28.060	28.058	8.0	28.053	28.060	28.053	12.0	28.050	28.055	28.051	16.0	28.047	28.052	28.048	20.0	28.043	28.047	28.042	24.0	28.036	28.040	28.034	25.0	28.034	28.038	28.032	27.5	28.031	28.034	28.029	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																			
0.0	28.061	28.068	28.068																																																			
4.0	28.057	28.060	28.058																																																			
8.0	28.053	28.060	28.053																																																			
12.0	28.050	28.055	28.051																																																			
16.0	28.047	28.052	28.048																																																			
20.0	28.043	28.047	28.042																																																			
24.0	28.036	28.040	28.034																																																			
25.0	28.034	28.038	28.032																																																			
27.5	28.031	28.034	28.029																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

**COSEL**

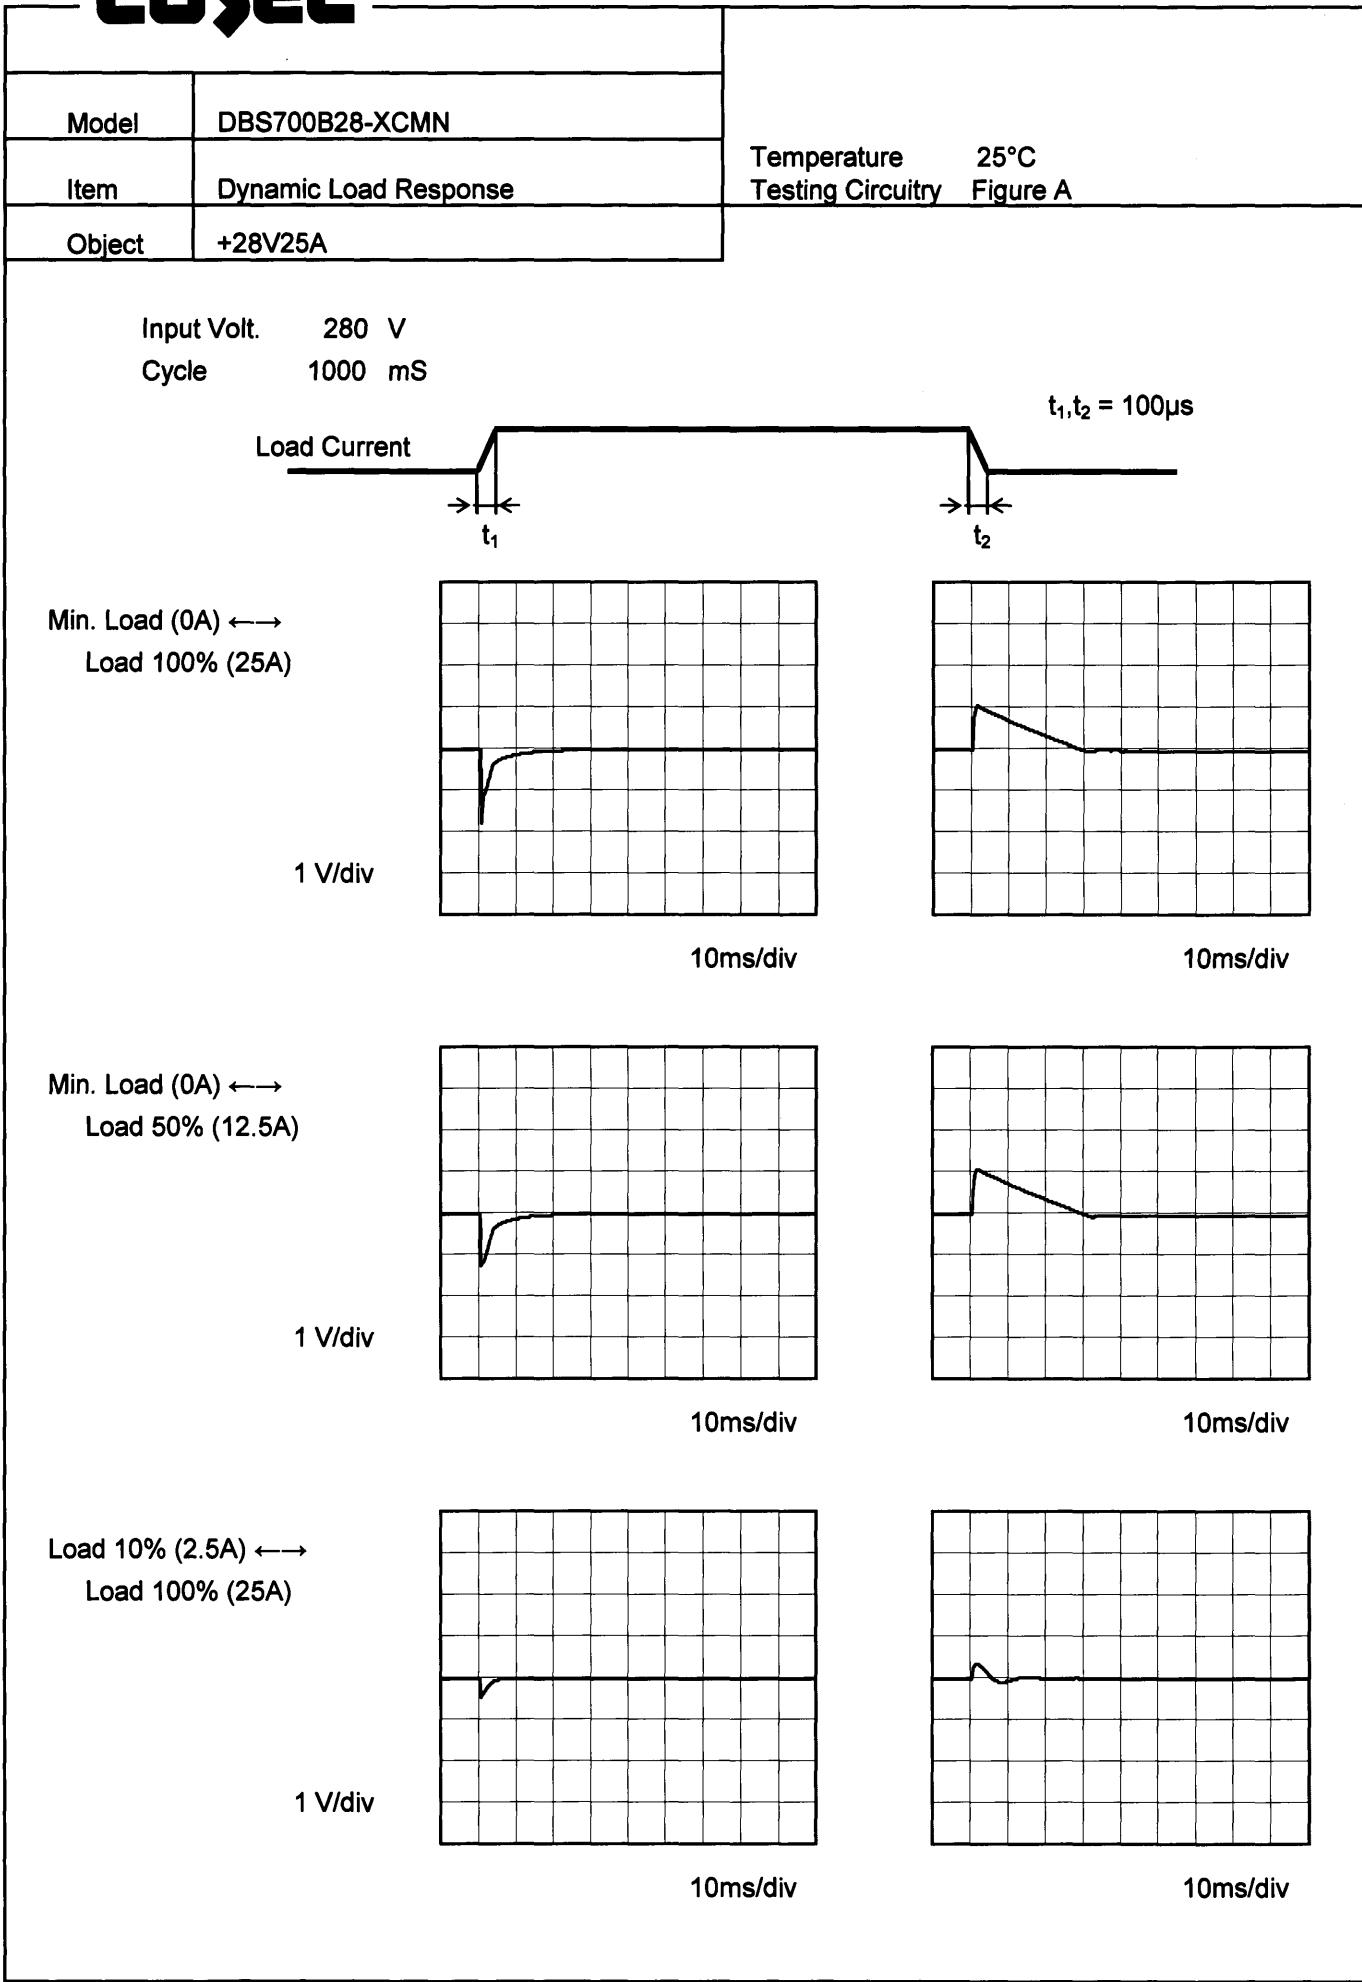


Model	DBS700B28-XCMN																																							
Item	Ripple Voltage (by Load Current)	Temperature Testing Circuitry      25°C Figure A																																						
Object	+28V25A																																							
1. Graph																																								
<p>Input Volt. 200V Input Volt. 400V</p> <p>Ripple Voltage [mV]</p> <p>Load Current [A]</p>																																								
<p>Measured by 20 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>Ripple [mVp-p]</p> <p>Fig.Complex Ripple Wave Form</p>																																								
<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 200 [V]</th> <th>Input Volt. 400 [V]</th> </tr> </thead> <tbody> <tr> <td>0.0</td><td>16</td><td>21</td></tr> <tr> <td>4.0</td><td>15</td><td>23</td></tr> <tr> <td>8.0</td><td>15</td><td>22</td></tr> <tr> <td>12.0</td><td>15</td><td>22</td></tr> <tr> <td>16.0</td><td>15</td><td>22</td></tr> <tr> <td>20.0</td><td>15</td><td>22</td></tr> <tr> <td>24.0</td><td>15</td><td>22</td></tr> <tr> <td>25.0</td><td>15</td><td>22</td></tr> <tr> <td>27.5</td><td>16</td><td>22</td></tr> <tr> <td>-</td><td>-</td><td>-</td></tr> <tr> <td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Ripple Voltage [mV]		Input Volt. 200 [V]	Input Volt. 400 [V]	0.0	16	21	4.0	15	23	8.0	15	22	12.0	15	22	16.0	15	22	20.0	15	22	24.0	15	22	25.0	15	22	27.5	16	22	-	-	-	-	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 200 [V]	Input Volt. 400 [V]																																						
0.0	16	21																																						
4.0	15	23																																						
8.0	15	22																																						
12.0	15	22																																						
16.0	15	22																																						
20.0	15	22																																						
24.0	15	22																																						
25.0	15	22																																						
27.5	16	22																																						
-	-	-																																						
-	-	-																																						

Model	DBS700B28-XCMN	Temperature Testing Circuitry	25°C Figure A																																						
Item	Ripple-Noise																																								
Object	+28V25A																																								
1. Graph			2. Values																																						
			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 200 [V]</th> <th>Input Volt. 400 [V]</th> </tr> </thead> <tbody> <tr> <td>0.0</td><td>26</td><td>21</td> </tr> <tr> <td>4.0</td><td>30</td><td>32</td> </tr> <tr> <td>8.0</td><td>32</td><td>36</td> </tr> <tr> <td>12.0</td><td>32</td><td>44</td> </tr> <tr> <td>16.0</td><td>32</td><td>49</td> </tr> <tr> <td>20.0</td><td>32</td><td>52</td> </tr> <tr> <td>24.0</td><td>32</td><td>57</td> </tr> <tr> <td>25.0</td><td>32</td><td>58</td> </tr> <tr> <td>27.5</td><td>30</td><td>55</td> </tr> <tr> <td>--</td><td>-</td><td>-</td> </tr> <tr> <td>--</td><td>-</td><td>-</td> </tr> </tbody> </table>	Load Current [A]	Ripple-Noise [mV]		Input Volt. 200 [V]	Input Volt. 400 [V]	0.0	26	21	4.0	30	32	8.0	32	36	12.0	32	44	16.0	32	49	20.0	32	52	24.0	32	57	25.0	32	58	27.5	30	55	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																								
	Input Volt. 200 [V]	Input Volt. 400 [V]																																							
0.0	26	21																																							
4.0	30	32																																							
8.0	32	36																																							
12.0	32	44																																							
16.0	32	49																																							
20.0	32	52																																							
24.0	32	57																																							
25.0	32	58																																							
27.5	30	55																																							
--	-	-																																							
--	-	-																																							
<p>Measured by 20 MHz Oscilloscope.          Ripple-Noise is shown as p-p in the figure below.          Note: Slanted line shows the range of the rated load current.</p>																																									
<p>Fig.Complex Ripple Noise Wave Form</p>																																									

Model	DBS700B28-XCMN
Item	Ripple Voltage (by Ambient Temp.)
Object	+28V25A

1. Graph

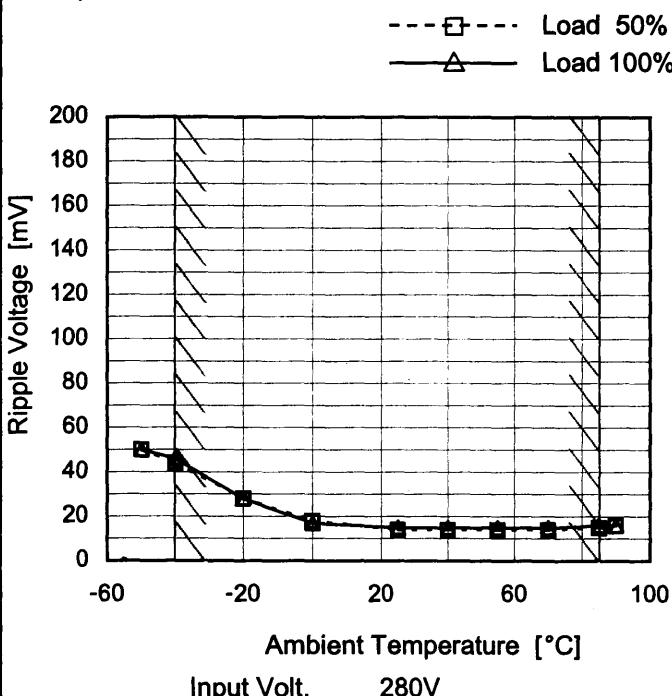


Measured by MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-50	50	50
-40	44	46
-20	28	28
0	18	17
25	14	15
40	14	15
55	14	15
70	14	15
85	15	16
90	16	16
--	-	-

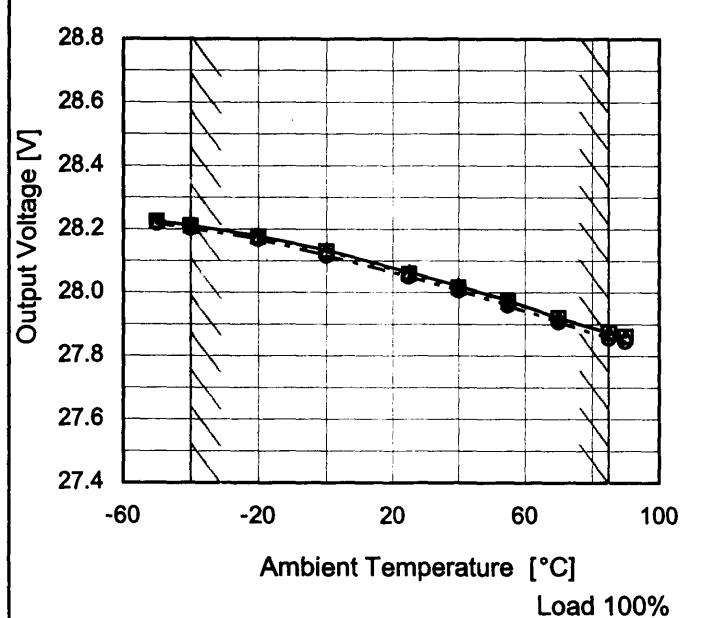Model	DBS700B28-XCMN
Item	Ambient Temperature Drift
Object	+28V25A
1. Graph	
<p style="text-align: center;"> <span style="display: inline-block; width: 15px; height: 15px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> Input Volt. 200V  <span style="display: inline-block; width: 15px; height: 15px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> Input Volt. 280V  <span style="display: inline-block; width: 15px; height: 15px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> Input Volt. 400V     </p>  <p style="text-align: center;">Output Voltage [V]</p> <p style="text-align: center;">Ambient Temperature [°C]</p> <p style="text-align: center;">Load 100%</p>	
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>	

### Testing Circuitry Figure A

### 2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]
-50	28.226	28.225	28.218
-40	28.212	28.211	28.203
-20	28.178	28.176	28.168
0	28.134	28.130	28.116
25	28.065	28.060	28.050
40	28.022	28.017	28.006
55	27.976	27.972	27.959
70	27.921	27.921	27.907
85	27.874	27.876	27.856
90	27.862	27.863	27.846
--	-	-	-



Model	DBS700B28-XCMN	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+28V25A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 85°C

Input Voltage : 200 - 400V


Load Current : 0 - 25A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

### 2. Values


Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-40	400	0	28.241		
Minimum Voltage	85	400	25	27.856	±193	±0.7

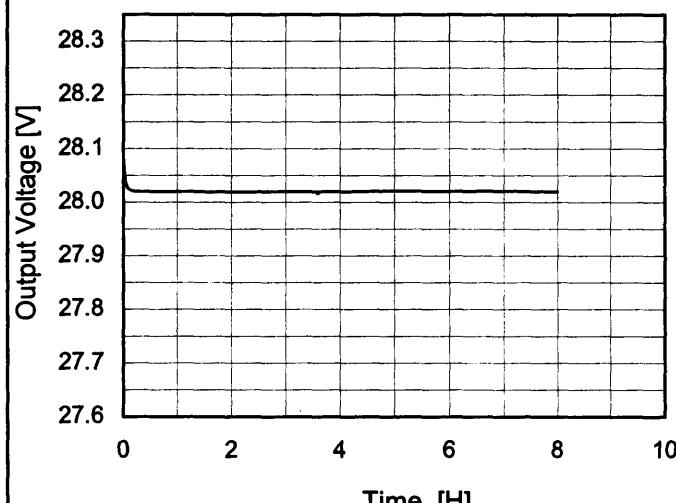Model	DBS700B28-XCMN	Temperature	25°C																						
Item	Time Lapse Drift	Testing Circuitry	Figure A																						
Object	+28V25A																								
1. Graph			2. Values																						
 <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 280V Load 100%</p>			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>28.082</td></tr> <tr><td>0.5</td><td>28.020</td></tr> <tr><td>1.0</td><td>28.020</td></tr> <tr><td>2.0</td><td>28.020</td></tr> <tr><td>3.0</td><td>28.020</td></tr> <tr><td>4.0</td><td>28.020</td></tr> <tr><td>5.0</td><td>28.021</td></tr> <tr><td>6.0</td><td>28.021</td></tr> <tr><td>7.0</td><td>28.021</td></tr> <tr><td>8.0</td><td>28.020</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	28.082	0.5	28.020	1.0	28.020	2.0	28.020	3.0	28.020	4.0	28.020	5.0	28.021	6.0	28.021	7.0	28.021	8.0	28.020
Time since start [H]	Output Voltage [V]																								
0.0	28.082																								
0.5	28.020																								
1.0	28.020																								
2.0	28.020																								
3.0	28.020																								
4.0	28.020																								
5.0	28.021																								
6.0	28.021																								
7.0	28.021																								
8.0	28.020																								

Model	DBS700B28-XCMN
Item	Rise and Fall Time
Object	+28V25A


Temperature 25°C  
Testing Circuitry Figure A


### 1. Graph

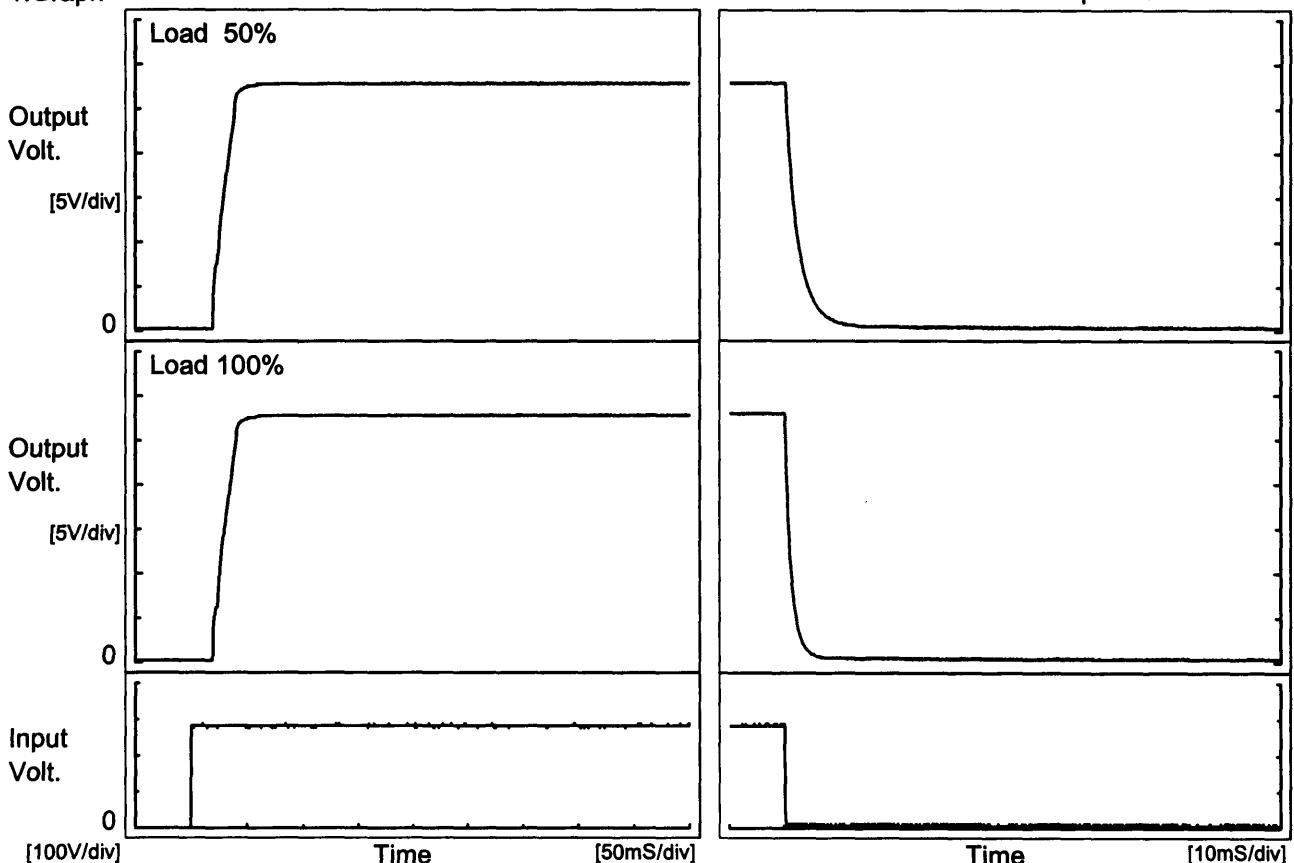

### 2. Values

Load	Time	Td	Tr	Ts	Th	Tf	[mS]
50 %		20.0	19.8	39.8	0.3	5.5	
100 %		20.0	20.8	40.8	0.2	2.8	

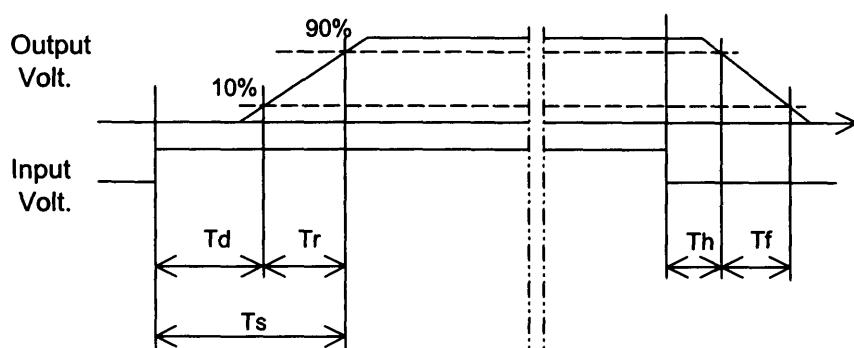

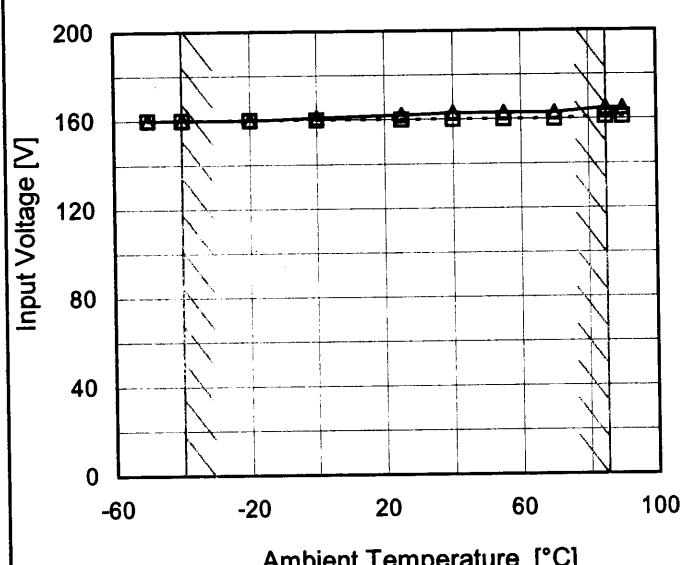Model	DBS700B28-XCMN																																							
Item	Minimum Input Voltage for Regulated Output Voltage																																							
Object	+28V25A																																							
Testing Circuitry Figure A																																								
1.Graph	<p style="text-align: center;"> <span style="display: inline-block; width: 15px; height: 15px; border: 1px dashed black; margin-right: 5px;"></span> Load 50%  <span style="display: inline-block; width: 15px; height: 15px; border: 1px solid black; margin-right: 5px;"></span> Load 100%         </p> 																																							
2.Values	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="text-align: left;">Ambient Temperature [°C]</th> <th colspan="2" style="text-align: center;">Input Voltage [V]</th> </tr> <tr> <th style="text-align: center;">Load 50%</th> <th style="text-align: center;">Load 100%</th> </tr> </thead> <tbody> <tr> <td>-50</td><td style="text-align: center;">160</td><td style="text-align: center;">160</td></tr> <tr> <td>-40</td><td style="text-align: center;">160</td><td style="text-align: center;">160</td></tr> <tr> <td>-20</td><td style="text-align: center;">160</td><td style="text-align: center;">160</td></tr> <tr> <td>0</td><td style="text-align: center;">160</td><td style="text-align: center;">161</td></tr> <tr> <td>25</td><td style="text-align: center;">160</td><td style="text-align: center;">162</td></tr> <tr> <td>40</td><td style="text-align: center;">160</td><td style="text-align: center;">163</td></tr> <tr> <td>55</td><td style="text-align: center;">160</td><td style="text-align: center;">163</td></tr> <tr> <td>70</td><td style="text-align: center;">160</td><td style="text-align: center;">163</td></tr> <tr> <td>85</td><td style="text-align: center;">161</td><td style="text-align: center;">165</td></tr> <tr> <td>90</td><td style="text-align: center;">161</td><td style="text-align: center;">165</td></tr> <tr> <td>--</td><td style="text-align: center;">-</td><td style="text-align: center;">-</td></tr> </tbody> </table>		Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-50	160	160	-40	160	160	-20	160	160	0	160	161	25	160	162	40	160	163	55	160	163	70	160	163	85	161	165	90	161	165	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-50	160	160																																						
-40	160	160																																						
-20	160	160																																						
0	160	161																																						
25	160	162																																						
40	160	163																																						
55	160	163																																						
70	160	163																																						
85	161	165																																						
90	161	165																																						
--	-	-																																						
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																								

Model	DBS700B28-XCMN	Temperature Testing Circuitry	25°C																																																							
Item	Overcurrent Protection	Figure A																																																								
Object	+28V25A																																																									
1.Graph		2.Values																																																								
<p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr><td>28.0</td><td>25.28</td><td>25.28</td><td>25.28</td></tr> <tr><td>26.6</td><td>30.75</td><td>30.46</td><td>30.19</td></tr> <tr><td>25.2</td><td>30.83</td><td>30.77</td><td>30.50</td></tr> <tr><td>22.4</td><td>31.17</td><td>30.96</td><td>31.18</td></tr> <tr><td>19.6</td><td>31.56</td><td>31.42</td><td>31.74</td></tr> <tr><td>16.8</td><td>32.02</td><td>31.94</td><td>32.54</td></tr> <tr><td>14.0</td><td>32.57</td><td>32.76</td><td>33.26</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Output Voltage [V]	Load Current [A]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	28.0	25.28	25.28	25.28	26.6	30.75	30.46	30.19	25.2	30.83	30.77	30.50	22.4	31.17	30.96	31.18	19.6	31.56	31.42	31.74	16.8	32.02	31.94	32.54	14.0	32.57	32.76	33.26	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																							
28.0	25.28	25.28	25.28																																																							
26.6	30.75	30.46	30.19																																																							
25.2	30.83	30.77	30.50																																																							
22.4	31.17	30.96	31.18																																																							
19.6	31.56	31.42	31.74																																																							
16.8	32.02	31.94	32.54																																																							
14.0	32.57	32.76	33.26																																																							
--	-	-	-																																																							
--	-	-	-																																																							
--	-	-	-																																																							
--	-	-	-																																																							
--	-	-	-																																																							

Model	DBS700B28-XCMN	Testing Circuitry Figure A																																																					
Item	Overvoltage Protection																																																						
Object	+28V25A																																																						
1.Graph	<p>Operating Point [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 0%</p> <ul style="list-style-type: none"> <li>— ▲ — Input Volt. 200V</li> <li>- - □ - - Input Volt. 280V</li> <li>- - ○ - - Input Volt. 400V</li> </ul>																																																						
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Operating Point [V]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr> <td>-50</td><td>35.74</td><td>35.68</td><td>35.68</td></tr> <tr> <td>-40</td><td>35.98</td><td>35.86</td><td>35.86</td></tr> <tr> <td>-20</td><td>36.39</td><td>36.27</td><td>36.27</td></tr> <tr> <td>0</td><td>36.86</td><td>36.74</td><td>36.74</td></tr> <tr> <td>25</td><td>37.44</td><td>37.26</td><td>37.26</td></tr> <tr> <td>40</td><td>37.74</td><td>37.68</td><td>37.68</td></tr> <tr> <td>55</td><td>38.14</td><td>37.97</td><td>37.97</td></tr> <tr> <td>70</td><td>38.43</td><td>38.43</td><td>38.37</td></tr> <tr> <td>85</td><td>38.84</td><td>38.66</td><td>38.66</td></tr> <tr> <td>90</td><td>38.96</td><td>38.84</td><td>38.84</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Ambient Temperature [°C]	Operating Point [V]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	-50	35.74	35.68	35.68	-40	35.98	35.86	35.86	-20	36.39	36.27	36.27	0	36.86	36.74	36.74	25	37.44	37.26	37.26	40	37.74	37.68	37.68	55	38.14	37.97	37.97	70	38.43	38.43	38.37	85	38.84	38.66	38.66	90	38.96	38.84	38.84	--	-	-	-
Ambient Temperature [°C]	Operating Point [V]																																																						
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																				
-50	35.74	35.68	35.68																																																				
-40	35.98	35.86	35.86																																																				
-20	36.39	36.27	36.27																																																				
0	36.86	36.74	36.74																																																				
25	37.44	37.26	37.26																																																				
40	37.74	37.68	37.68																																																				
55	38.14	37.97	37.97																																																				
70	38.43	38.43	38.37																																																				
85	38.84	38.66	38.66																																																				
90	38.96	38.84	38.84																																																				
--	-	-	-																																																				
Note:	Slanted line shows the range of the rated ambient temperature.																																																						


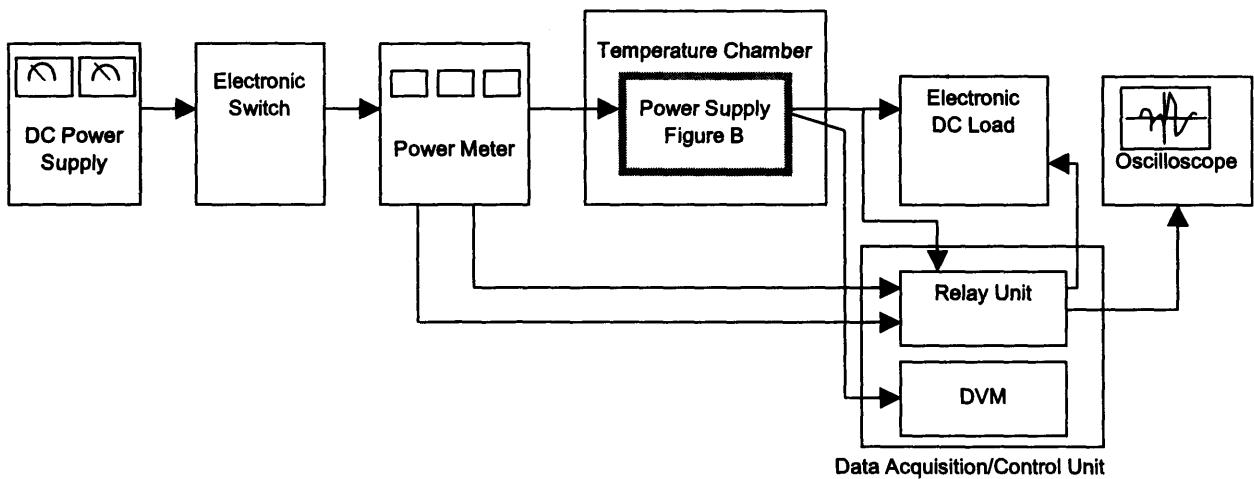


Figure A

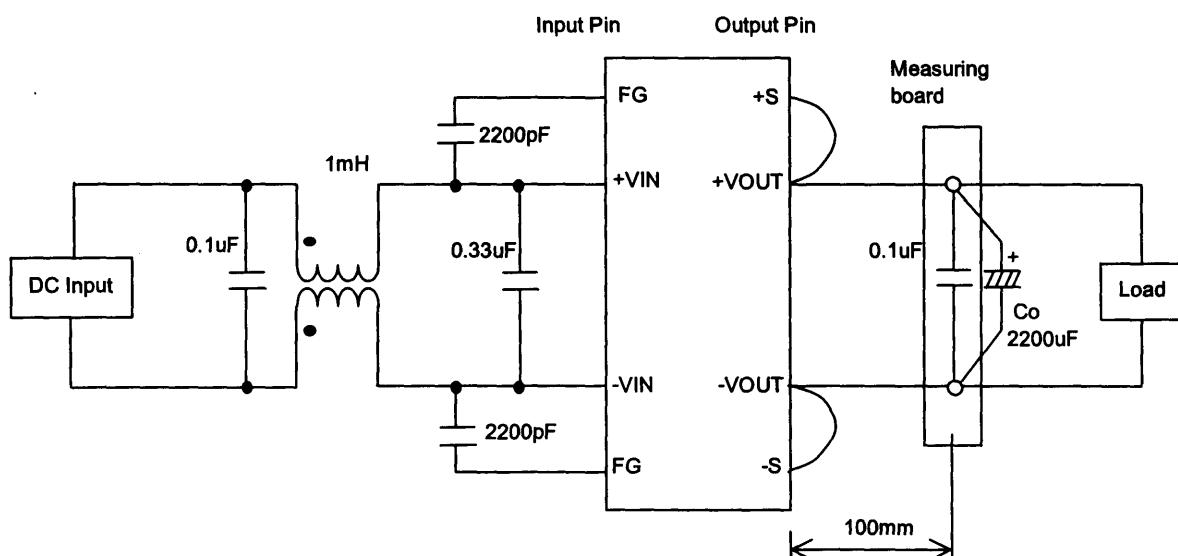

FG:Mounting Hole

Figure B