




**POWER MATE  
TECHNOLOGY CO.,LTD.**

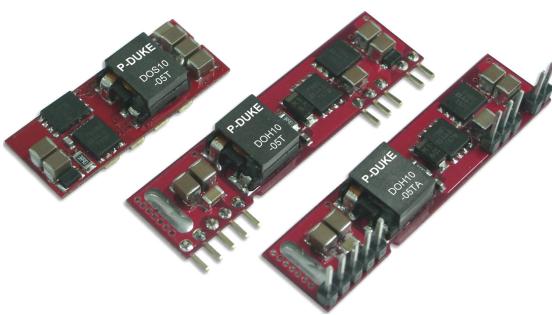

### APPLICATIONS

Wireless Network  
Telecom/Datacom  
Industry Control System  
Distributed Power Architectures  
Semiconductor Equipment  
Microprocessor Power Applications

**DOS10-05T** Non-isolated  
**DOH10-05T** Point of load DC/DC converters

### FEATURES

- OUTPUT CURRENT UP TO 10A
- SMALL SIZE AND LOW PROFILE :  
1.30" X 0.53" X 0.30" (SMD) ; 2.00" X 0.50" X 0.28" (SIP)
- HIGH EFFICIENCY UP TO 95% @ 3.3V FULL LOAD
- INPUT RANGE FROM 2.4VDC TO 5.5VDC
- FIXED SWITCHING FREQUENCY (300KHZ)
- SMD & SIP PACKAGES
- SMD PACKAGE QUALIFIED FOR LEADFREE REFLOW SOLDER PROCESS ACCORDING IPC J-STD-020D
- OUTPUT VOLTAGE PROGRAMMABLE FROM 0.75VDC TO 3.3VDC VIA EXTERNAL RESISTOR
- INPUT UNDER-VOLTAGE PROTECTION
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2011/65/EU

### OPTIONS

POSITIVE LOGIC REMOTE ON/OFF

### DESCRIPTION

DOS10-05T (SMD type), DOH10-05T (for Vertical Mounting SIP type) and DOH10-05TA (for Horizontal Mounting SIP type) are non-isolated DC/DC converters that can deliver up to 10A of output current with full load efficiency of 95% at 3.3V output.

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C otherwise noted

| OUTPUT SPECIFICATIONS             |  |  |                |
|-----------------------------------|--|--|----------------|
| Output current                    | 10A max  |  |                |
| Voltage accuracy                  | ± 2%Vout(set)  |  |                |
| Minimum load                      | 0%   |  |                |
| Line regulation                   | Vin=Vout(set)+0.5V to Vin(max)<br>at Full Load   | ± 0.3%Vout(set)  |                |
| Load regulation                   | No Load to Full Load   | ± 0.4%Vout(set)  |                |
| Ripple and noise (Note2)          | 20MHz bandwidth  | 15mVrms,max<br>50mVp-p,max   |                |
| Temperature coefficient           |  | ±0.4%  |                |
| Dynamic load response (Note 2)    | △Io / △t = 2.5A/μS ,Vin(nom)<br>Load change step (50% to 100% or 100% to 50% of Io(max)) | Peak deviation<br>Setting time (Vout<10%peak deviation)  | 200mV<br>25μS  |
| Dynamic load response (Note 3)    | △Io / △t = 2.5A/μS ,Vin(nom)<br>Load change step (50% to 100% or 100% to 50% of Io(max)) | Peak deviation<br>Setting time (Vout<10%peak deviation)  | 100mV<br>100μS |
| Output current limit              |  | 200%   |                |
| Output short-circuit current      |  | Hiccup, automatics recovery  |                |
| External load capacitance         | ESR ≥1mΩ<br>ESR ≥10mΩ  | 1000μF,max<br>5000μF,max   |                |
| Output voltage overshoot-startup  | Vin=2.4 ~ 5.5V, F.L.   | 1%Vout(set)  |                |
| Voltage adjustability (see fig.1) | (Note 4)   | 0.7525V ~ 3.63V  |                |
| GENERAL SPECIFICATIONS            |  |  |                |
| Efficiency                        | See table  |  |                |
| Isolation voltage                 | None   |  |                |
| Switching frequency               | 300KHz±10%   |  |                |
| Approvals and standard            | IEC60950-1, UL60950-1, EN60950-1   |  |                |
| Dimensions                        | SMD<br>SIP   | 1.30 X 0.53 X 0.30 Inch<br>(33.0 X 13.5 X 7.7 mm)<br>2.00 X 0.50 X 0.28 Inch<br>(50.8 X 12.7 X 7.2 mm) |                |
| Weight                            |  | 6.0g(0.22oz)   |                |
| MTBF (Note 1)                     | BELLCORE TR-NWT-000332<br>MIL-HDBK-217F  | 1.428 x 10 <sup>7</sup> hrs<br>1.007 x 10 <sup>6</sup> hrs   |                |

| INPUT SPECIFICATIONS  |   |   |  |
|---|---|---|--|
| Input voltage range   | Vout(set) < Vin – 0.5V                                    | 2.4 ~ 5.5VDC  |  |
| Maximum input current                                       | Vin=2.4 to 5.5V; Io=Io(max)                               | 10A   |  |
| Input filter (Note 5)                                       |   | C filter  |  |
| Input no load current (Vin=5V, Io=0, module enabled)        | Vout(set) =0.75VDC<br>Vout(set) =3.3VDC                   | 100mA<br>130mA  |  |
| Input under voltage lockout                                 | Start-up voltage<br>Shutdown voltage                      | 2.2VDC<br>2.0VDC                                      |  |
| Input reflected ripple current5~20MHz, 1μH source impedance |   | 100mA p-p   |  |
| ENVIRONMENTAL SPECIFICATIONS                                |   |   |  |
| Operating ambient temperature                               | –40°C ~ +85°C (with derating)                             |   |  |
| Storage temperature range                                   | –55°C ~ +125°C  |   |  |
| Thermal shock   | MIL-STD-810F  |   |  |
| Vibration   | MIL-STD-810F  |   |  |
| Relative humidity(non-condensing)                           | 5% ~ 95% RH   |   |  |
| Lead-free reflow solder process                             | IPC J-STD-020D  |   |  |
| Moisture sensitivity level(MSL)                             | IPC J-STD-033B  |   |  |
| Over temperature protection                                 | Level 2a  |   |  |
| FEATURE SPECIFICATIONS                                      |   |   |  |
| Remote ON/OFF(Note 6)                                       | ON = Open or 0V < Vr < 0.3V<br>OFF = 1.5V < Vr < Vin(max) | I <sub>IN</sub> =10μA,max<br>I <sub>IN</sub> =1mA,max |  |
| (Positive logic)(option)                                    | ON = Open or Vin(max)<br>OFF=0V < Vr < 0.3V               | I <sub>IN</sub> =10μA,max<br>I <sub>IN</sub> =1mA,max |  |
| Input current of Remote control pin                         |   | 10μA~1.0mA  |  |
| Remote off state input current                              | Nominal Input   | 1.5mA,typ   |  |
| Remote sense range  |   | 0.5V,max  |  |
| Rise time   | Time for Vout to rise from 10% to 90%of Vout(set)         | 6mS, max.   |  |
| Turn-on delay time  | Case 1 (Note7)<br>Case 2 (Note8)                          | 1mS<br>1mS  |  |



[WWW.PDUKE.COM](http://WWW.PDUKE.COM)



**POWER MATE  
TECHNOLOGY CO.,LTD.**

**DOS10-05T** Non-isolated  
**DOH10-05T** Point of load DC/DC converters

| Model Name   | ON/OFF Logic | Package | Input Voltage                           | Output Voltage | Output Current |           | Efficiency (%)<br>5.0Vin,<br>3.3VDC@10A |
|--------------|--------------|---------|---|----------------|----------------|-----------|---|
|              |              |         |   |                | Min. Load      | Max. Load |   |
| DOS10-05T    | Negative     | SMD     | 2.4 ~ 5.5VDC<br>Vin(min)=Vout(set)+0.5V | 0.75 ~ 3.3VDC  | 0A             | 10A       | 95%                                     |
| DOS10-05T-P  | Positive     |         |   |                |                |           |   |
| DOH10-05T    | Negative     |         |   |                |                |           |   |
| DOH10-05T-P  | Positive     |         |   |                |                |           |   |
| DOH10-05TA   | Negative     |         |   |                |                |           |   |
| DOH10-05TA-P | Positive     |         |   |                |                |           |   |

#### Note

1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.  
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
2. External with  $C_{out} = 1\mu F$  ceramic// $10\mu F$  tantalum capacitors.
3. External with  $C_{out} = 2$ pcs of  $150\mu F$  polymer capacitors.
4. Output voltage programmable from 0.75V to 3.3V by connecting a single resistor (shown as  $R_{trim}$  in Table 1) between the TRIM and GND pins of the module. To calculate the value of the resistor  $R_{trim}$  for a particular output voltage  $V_{out}$ , use the following equation:

$$R_{trim} = \left[ \frac{21070}{V_{out} - 0.7525} - 5110 \right] \Omega$$

5. It's necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensuring module stability. The external  $C_{in}$  is 3pcs of  $150\mu F$  low-ESR polymer capacitors // 2pcs of  $47\mu F$  ceramic capacitors at least.
6. Device code with suffix "-P" – Positive logic(ON/OFF is open collector/drain logic input; Signal referenced to GND )  
Device code with no suffix – Negative logic (ON/OFF pin is open collector/drain logic input with external pull-up resistor; signal referenced to GND)
7. Case 1 : On/Off input is set to logic low (module on) and then input power is applied (delay from instant at which  $V_{in}=V_{in}(\min)$  until  $V_{out}=10\%$  of  $V_{out}(\text{set})$ )
8. Case 2 : Input power is applied for at least one second and then the ON/OFF input is set to logic low (delay from instant at which  $V_{on/off}=0.3V$  until  $V_{out}=10\%$  of  $V_{out}(\text{set})$ )

**CAUTION:** This power module is not internally fused. An input line fuse must always be used.




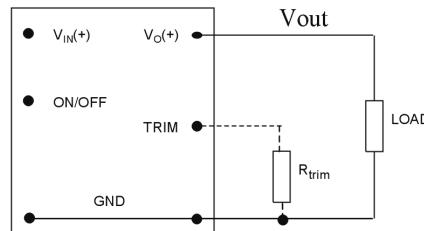


Fig. 1

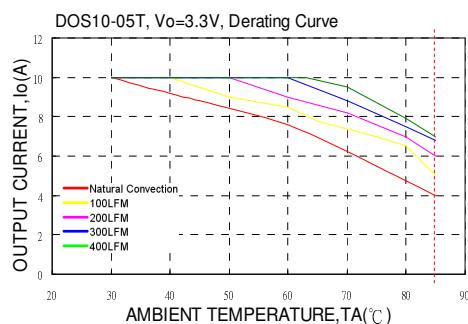

| Table 1       |            |
|---------------|------------|
| Vout(set) (V) | Rtrim (KΩ) |
| 0.7525        | Open       |
| 1.2           | 41.973     |
| 1.5           | 23.077     |
| 1.8           | 15.004     |
| 2.5           | 6.974      |
| 3.3           | 3.160      |

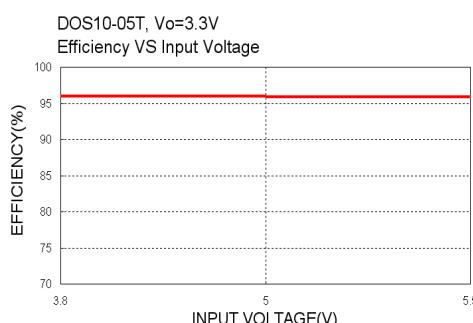

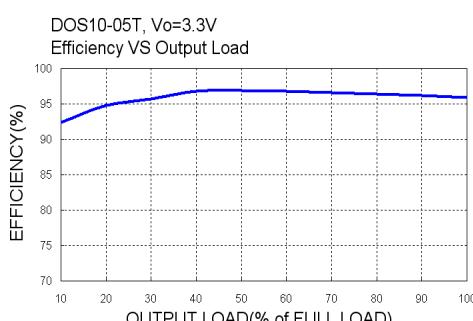


**POWER MATE  
TECHNOLOGY CO.,LTD.**


**DOS10-05T** Non-isolated  
**DOH10-05T** Point of load DC/DC converters

### Mechanical Drawing


**DOH10-05T**

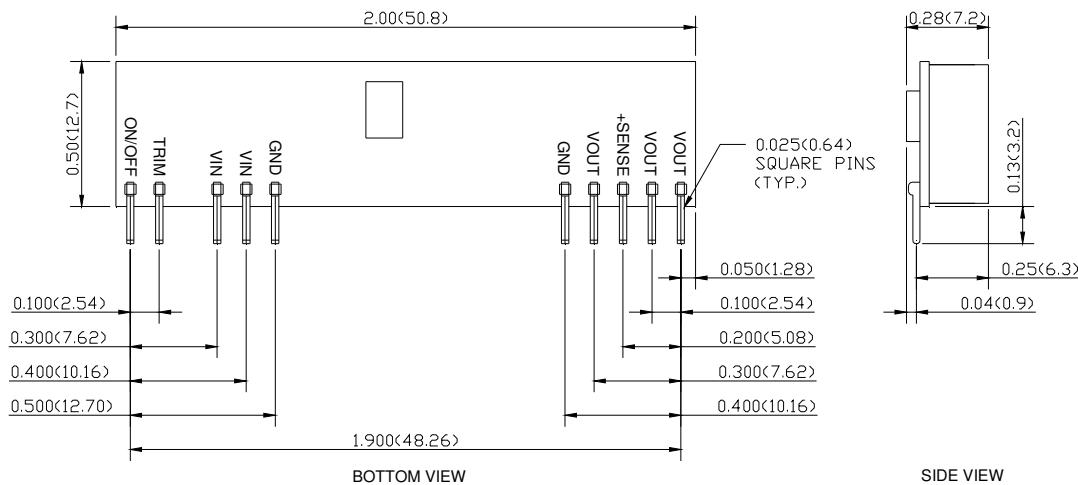

**DOH10-05TA**

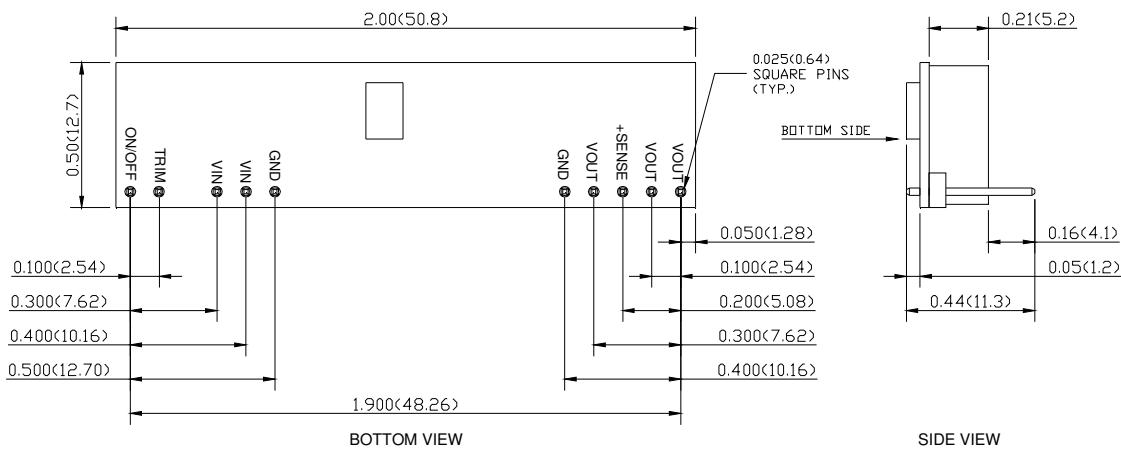

**DOS10-05T**

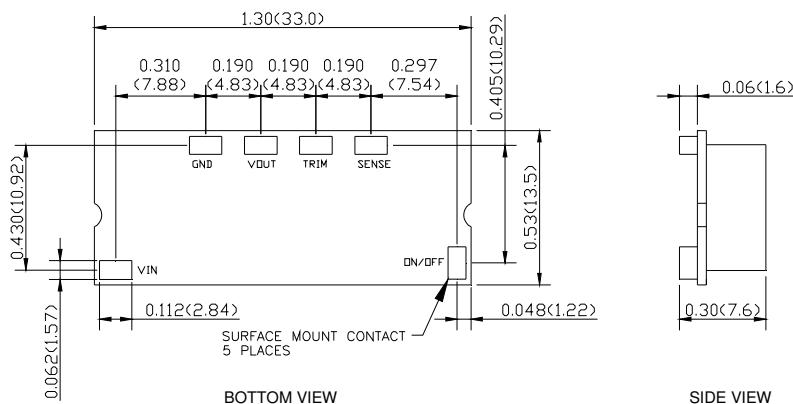

1. All dimensions in Inch (mm)  
Tolerance:  $X.XX \pm 0.02$  ( $X.X = 0.5$ )  
 $X.XXX \pm 0.01$  ( $X.XX \pm 0.25$ )
2. Pin pitch tolerance  $\pm 0.01$  (0.25)
3. Pin dimension tolerance  $\pm 0.004$  (0.1)



[WWW.PDUKE.COM](http://WWW.PDUKE.COM)