





RoHS

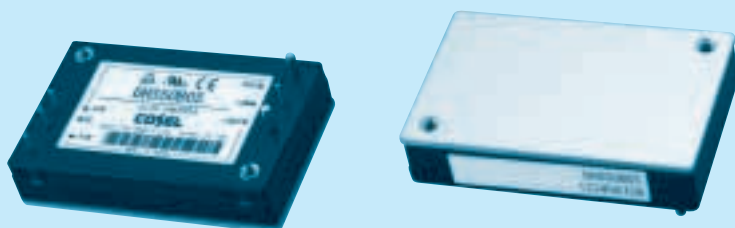

* Providing heat sink
as option



- ① Series name
② Single output
③ Output wattage
④ B : DC200-400V
⑤ Output voltage

MODEL	DHS50B03	DHS50B05	DHS50B12	DHS50B15	DHS50B24	DHS50B28
MAX OUTPUT WATTAGE[W]	33.0	50.0	50.4	51.0	50.4	50.4
DC OUTPUT	3.3V 10A	5V 10A	12V 4.2A	15V 3.4A	24V 2.1A	28V 1.8A

SPECIFICATIONS

	MODEL	DHS50B03	DHS50B05	DHS50B12	DHS50B15	DHS50B24	DHS50B28
INPUT	VOLTAGE[V]	DC200 - 400					
	CURRENT[A]	*1 0.15A	0.22A	0.22A	0.22A	0.22A	0.22A
	EFFICIENCY[%]	*1 77.0typ	80.0typ	83.0typ	83.0typ	83.0typ	82.0typ
OUTPUT	VOLTAGE[V]	3.3	5	12	15	24	28
	CURRENT[A]	10	10	4.2	3.4	2.1	1.8
	LINE REGULATION[mV]	10max	10max	24max	30max	48max	56max
	LOAD REGULATION[mV]	10max	10max	24max	30max	48max	56max
	RIPPLE[mVp-p]	0 to +100℃ *2	80max	80max	120max	120max	120max
		-40 to 0℃ *2	120max	120max	150max	150max	150max
		0 to 15% Load *2	160max	160max	240max	240max	240max
	RIPPLE NOISE[mVp-p]	0 to +100℃ *2	120max	120max	150max	150max	150max
		-40 to 0℃ *2	200max	200max	200max	250max	250max
		0 to 15% Load *2	240max	240max	300max	300max	300max
	TEMPERATURE REGULATION[mV]	0 to +65℃	35max	50max	120max	150max	240max
		-40 to +100℃	66max	100max	240max	480max	560max
	DRIFT[mV]	*3 16max	20max	40max	60max	90max	90max
	START-UP TIME[ms]	200max (DCIN 280V, Io=100%)					
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	Fixed (TRM pin open), adjustable by external VR or external voltage					
		2.97 - 3.96	4.50 - 6.00	10.80 - 13.20	13.50 - 16.50	21.60 - 26.40	25.20 - 30.80
PROTECTION CIRCUIT AND OTHERS	OUTPUT VOLTAGE SETTING[V]	3.30 - 3.40	4.97 - 5.13	11.91 - 12.29	14.76 - 15.24	23.62 - 24.38	27.56 - 28.44
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically					
	OVERVOLTAGE PROTECTION[V]	4.20 - 5.70	6.30 - 7.60	13.90 - 17.55	17.25 - 21.75	27.60 - 34.80	32.20 - 40.60
	REMOTE SENSING	None					
ISOLATION	REMOTE ON/OFF	Provided (Negative Logic L : ON, H : OFF)					
	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)					
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)					
ENVIRONMENT	OUTPUT-FG	AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (20±15℃)					
	OPERATING TEMP., HUMID. AND ALTITUDE	-40 to +100℃ (On aluminum base plate), 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000 feet) max					
	STORAGE TEMP., HUMID. AND ALTITUDE	-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max					
	VIBRATION	10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis					
SAFETY	IMPACT	196.1m/s ² (20G), 11ms, once each along X, Y and Z axis					
	AGENCY APPROVALS	UL60950-1, C-UL, EN60950-1					
OTHERS	CASE SIZE/WEIGHT	58.4×12.7×37.3mm (W×H×D) / 60g max					
	COOLING METHOD	Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink)					



*1 At rated input(DC280V) and rated load.

*2 Ripple and ripple noise is measured by using measuring board. Refer to the manual

*3 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃, with the input voltage held constant at the rated input/output.

*4 Refer to the manual for input range.

External view

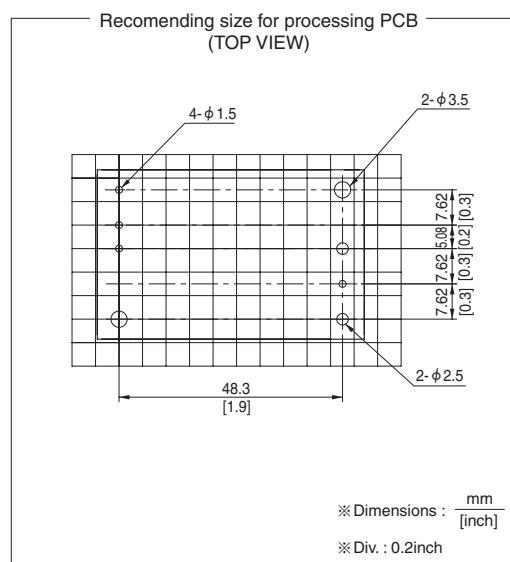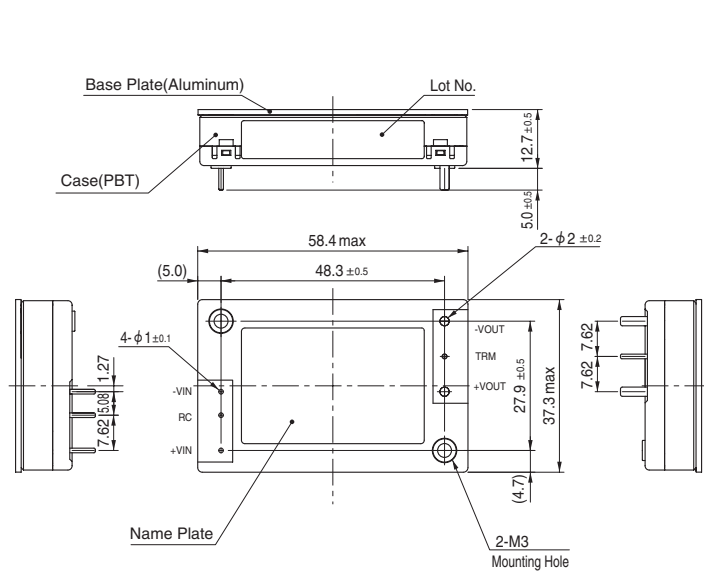

- ※ Tolerance : ±0.3
- ※ Weight : 60g or less
- ※ Dimensions in mm.
- ※ Mounting hole screwing torque : 0.49N · m (5.0kgf · cm) max