

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Distributed Power Architectures
Semiconductor Equipment
Microprocessor Power Applications

FEATURES

- OUTPUT CURRENT UP TO 6A
- SMALL SIZE AND LOW PROFILE :
0.80" X 0.45" X 0.25" (SMD) ; 0.90" X 0.40" X 0.24" (SIP)
- HIGH EFFICIENCY UP TO 89% @ 3.3V FULL LOAD
- INPUT RANGE FROM 8.3VDC TO 14.0VDC
- FIXED SWITCHING FREQUENCY (300KHZ)
- SMD & SIP PACKAGES
- SMD PACKAGE QUALIFIED FOR LEADFREE REFLOW SOLDER PROCESS ACCORDING IPC J-STD-020D
- OUTPUT VOLTAGE PROGRAMMABLE FROM 0.75VDC TO 5.0VDC VIA EXTERNAL RESISTOR
- INPUT UNDER-VOLTAGE PROTECTION
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2011/65/EU

OPTIONS

POSITIVE LOGIC REMOTE ON/OFF

DESCRIPTION

DOS06-12T (SMD type), DOH06-12T (for Vertical Mounting SIP type) and DOH06-12TA (for Horizontal Mounting SIP type) are non-isolated DC/DC converters that can deliver up to 6A of output current with full load efficiency of 89% at 3.3V output.


TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS	
Output current	6A max
Voltage accuracy	± 2%Vout(set)
Minimum load	0%
Line regulation	Vin=Vin(min) to Vin(max) at Full Load ± 0.3%Vout(set)
Load regulation	No Load to Full Load ± 0.4%Vout(set)
Ripple and noise (Note2)	20MHz bandwidth 20mVrms,max 50mVp-p,max
Temperature coefficient	±0.4%
Dynamic load response (Note 2)	ΔIo / Δt = 2.5A/μS , Vin(nom) Peak deviation 200mV
	Load change step (50% to 100% or 100% to 50% of Io(max)) Setting time (Vout<10%peak deviation) 25μS
Dynamic load response (Note 3)	ΔIo / Δt = 2.5A/μS , Vin(nom) Peak deviation 50mV
	Load change step (50% to 100% or 100% to 50% of Io(max)) Setting time (Vout<10%peak deviation) 50μS
Output current limit	200%
Output short-circuit current	Hiccup, automatics recovery
External load capacitance	ESR ≥ 1mΩ 1000μF,max
	ESR ≥ 10mΩ 3000μF,max
Output voltage overshoot-startup	Vin=Vin(min) ~ Vin(max); F.L. 1%Vout(set)
Voltage adjustability (see fig.1)	(Note 4) 0.7525V ~ 5.0V
GENERAL SPECIFICATIONS	
Efficiency	See table
Isolation voltage	None
Switching frequency	300KHz±10%
Approvals and standard	IEC60950-1, UL60950-1, EN60950-1
Dimensions	SMD 0.80 X 0.45 X 0.25 Inch (20.3 X 11.4 X 6.5 mm)
	SIP 0.90 X 0.40 X 0.24 Inch (22.9 X 10.2 X 6.0 mm)
Weight	2.8g(0.1oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332 1.990 x 10 ⁷ hrs
	MIL-HDBK-217F 3.007 x 10 ⁶ hrs

INPUT SPECIFICATIONS	
Input voltage range	Vout(set) ≤ 3.63V Vin(nom) = 12V 8.3 ~ 14VDC
	Vout(set) > 3.63V 8.3 ~ 13.2VDC
Maximum input current	Vin=Vin(min); Io=Io(max) 4.5A
Input filter (Note 5)	C filter
Input no load current (Vin=12V, Io=0, module enabled)	Vout(set) = 0.75VDC 17mA
	Vout(set) = 5.0VDC 100mA
Input under voltage lockout	Start-up voltage 7.9VDC
	Shutdown voltage 7.8VDC
Input reflected ripple current	5~20MHz, 1μH source impedance 30mA/p-p

ENVIRONMENTAL SPECIFICATIONS	
Operating ambient temperature	-40°C ~ +85°C(with derating)
Storage temperature range	-55°C ~ +125°C
Thermal shock	MIL-STD-810F
Vibration	MIL-STD-810F
Relative humidity(non-condensing)	5% ~ 95% RH
Lead-free reflow solder process	IPC J-STD-020D
Moisture sensitivity level(MSL)	IPC J-STD-033B Level 2a
Over temperature protection	140°C

FEATURE SPECIFICATIONS	
Remote ON/OFF(Note 6)	
Negative logic(standard)	ON = Open or 0V < Vr < 0.3V IIN=10μA,max
	OFF = 2.5V < Vr < Vin(max) IIN=1mA,max
Positive logic(option)	ON = Open or (Vin-4) < Vr < Vin(max) IIN=10μA,max
	OFF=0V < Vr < 0.3V IIN=1mA,max
Input current of Remote control pin	10μA~1.0mA
Remote off state input current	Nominal Input 1.2mA
Rise time	Time for Vout to rise from 10% to 90%of Vout(set) 6mS, max.
Turn-on delay time	Case 1 (Note 7) 3mS
	Case 2 (Note 8) 3mS

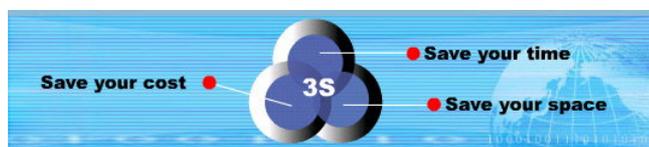



Model Name	ON/OFF Logic	Package	Input Voltage	Output Voltage	Output Current		Efficiency (%) 12Vin, 3.3VDC@6A
					Min. Load	Max. Load	
DOS06-12T	Negative	SMD	Vout(set) ≤ 3.63V Vin = 8.3-14VDC	0.75 ~ 5.0VDC	0A	6A	89%
DOS06-12T-P	Positive						
DOH06-12T	Negative	Vertical Mounting SIP	Vout(set) > 3.63V Vin = 8.3-13.2VDC	0.75 ~ 5.0VDC	0A	6A	89%
DOH06-12T-P	Positive						
DOH06-12TA	Negative	Horizontal Mounting SIP	Vout(set) > 3.63V Vin = 8.3-13.2VDC	0.75 ~ 5.0VDC	0A	6A	89%
DOH06-12TA-P	Positive						

Note

- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C. MIL-HDBK-217F Notice2 @Ta=25 °C, Full load (Ground, Benign, controlled environment).
- External with C_{out} = 1µF ceramic/10µF tantalum capacitors.
- External with C_{out} = 2pcs of 150µF polymer capacitors.
- Output voltage programmable from 0.7525V to 5V by connecting a single resistor (shown as R_{trim} in Table 1) between the TRIM and GND pins of the module. To calculate the value of the resistor **R_{trim}** for a particular output voltage **V_{out}**, use the following equation:

$$R_{trim} = \left[\frac{10500}{V_{out} - 0.7525} - 1000 \right] \Omega$$

- It's necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensuring module stability. The external C_{in} is 2pcs of 47µF ceramic capacitors at least.
- Device code with suffix “-P” – Positive logic(ON/OFF is open collector/drain logic input; Signal referenced to GND)
Device code with no suffix – Negative logic (ON/OFF pin is open collector/drain logic input with external pull –up resistor; signal referenced to GND)
- Case 1 :On/Off input is set to logic low (module on) and then input power is applied (delay from instant at which Vin=Vin(min) until Vout=10% of Vout(set))
- Case 2 :Input power is applied for at least one second and then the ON/OFF input is set to logic low (delay form instant at which Von/off=0.3V until Vout=10% of Vout(set))

CAUTION: This power module is not internally fused. An input line fuse must always be used.




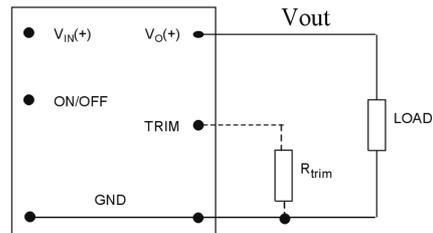


Fig. 1

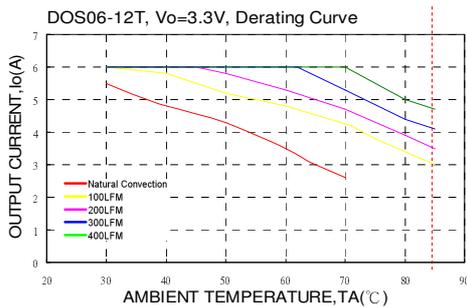


Vout(set) (V)	Rtrim (KΩ)
0.7525	Open
1.2	22.46
1.5	13.05
1.8	9.024
2.5	5.009
3.3	3.122
5	1.472

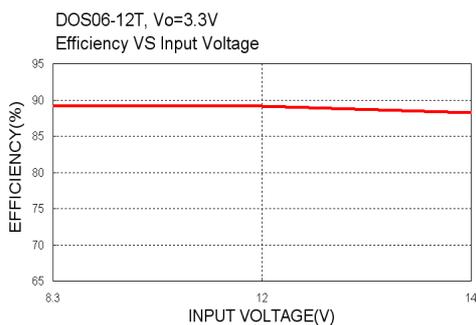

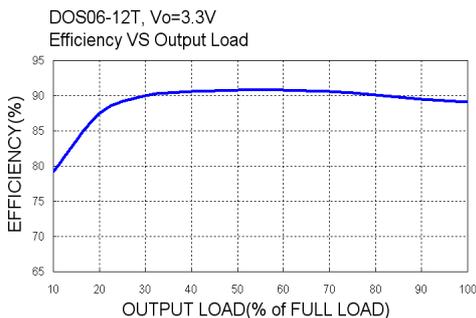


Mechanical Drawing


DOH06-12T

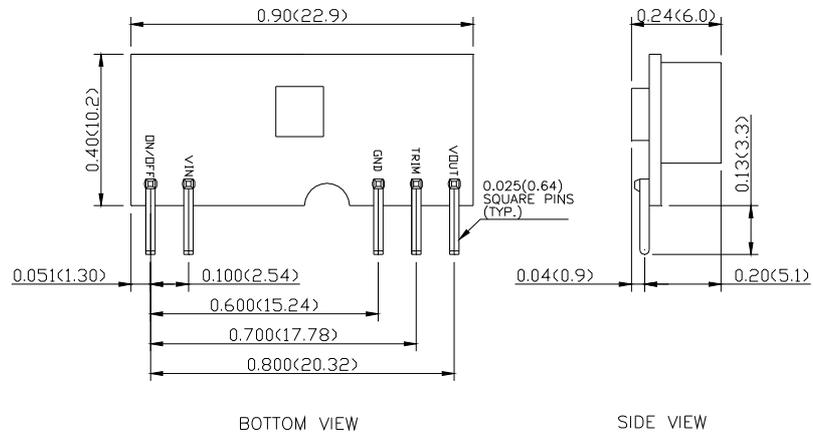

DOH06-12TA

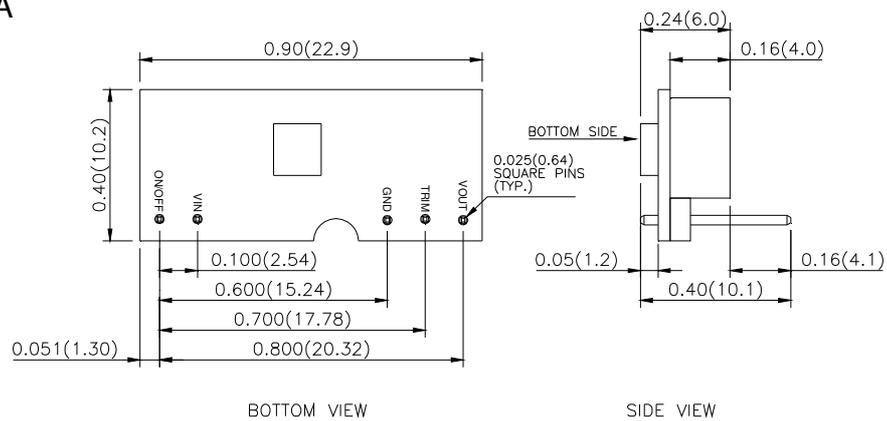

DOS06-12T

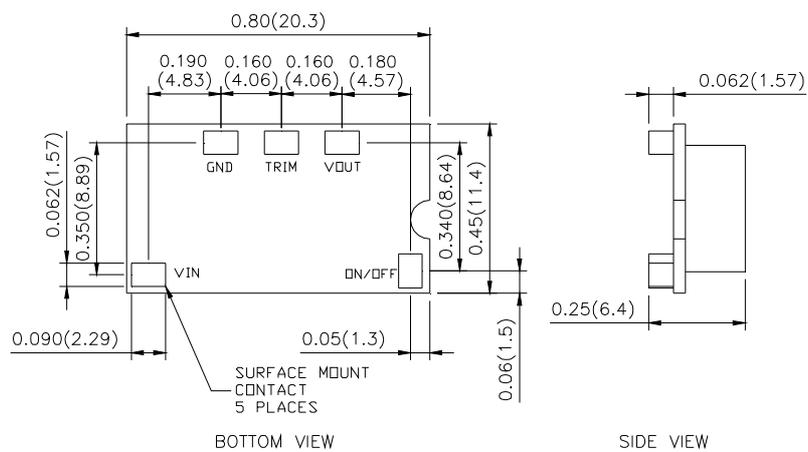

1. All dimensions in Inch (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01 (0.25)
3. Pin dimension tolerance ±0.004 (0.1)

