



FEATURES

- 10 WATTS MAXIMUM OUTPUT POWER
- ULTRA LOW QUIESCENT CURRENT
- SINGLE OUTPUT UP TO 3A
- SMALL SIZE AND LOW PROFILE : 1.0 x 1.0 x 0.39 INCH
- HIGH EFFICIENCY UP TO 91%
- 4:1 ULTRA WIDE INPUT VOLTAGE RANGE
- SIX-SIDED CONTINUOUS SHIELD
- FIXED SWITCHING FREQUENCY
- INPUT TO OUTPUT ISOLATION:1600VDC
- BUILT-IN EN55022 CLASS B FILTER
- CE MARK MEETS 2006/95/EC, 2011/95/EC AND 2004/108/EC
- SAFETY MEETS UL60950-1, EN60950-1 AND IEC60950-1
- COMPLIANT TO RoHS EU DIRECTIVE 2011/65/EU

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

OPTIONS

Positive logic Remote ON/OFF, Without trim, Without CTRL pin

DESCRIPTION

LCD10W DC/DC converters provide up to 10 watts of output power in an industry standard package and footprint. These units are specifically designed to meet the power needs of low profile. All models feature with 4:1 ultra wide input voltage of 9~36 VDC and 18~75VDC, comprehensively protected against over-current, over-voltage and input under-voltage protection conditions, and trimmable output voltage. The converter can meet EN55022 Class B with an external capacitor only.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			
Output power (Rated)		10 Watts	
Output power (Maximum)	With Trim up 10%	11 Watts	
	With Trim up 20%	12 Watts	
Voltage accuracy		±1%	
Minimum load		0%	
Voltage adjustability	Single (Note 6)	3.3 & 12Vout	± 10%
		Others	+20%, -10%
Line regulation	LL to HL at Full Load	Single	± 0.2%
		Dual	± 0.5%
Load regulation	No Load to Full Load	Single	± 0.2%
		Dual	± 1.0%
	10% Load to 90%Load	Single	± 0.1%
		Dual	± 0.8%
Cross regulation	Asymmetrical load 25%/100% FL	Dual	± 5%
Ripple and noise	20MHz bandwidth (Note 4)		See table
Temperature coefficient			±0.02% / °C, max.
Transient response recovery time	25% load step change		250µs
Over voltage protection	3.3VDC output	3.7VDC~5.4VDC	
	5VDC output	6.3VDC~7.4VDC	
	12VDC output	13.5VDC~19.6VDC	
	15VDC output	18.3VDC~22.0VDC	
	24VDC output	29.1VDC~32.5VDC	
Over load protection	% of FL at nominal input		150%
Short circuit protection		Continuous, automatics recovery	

GENERAL SPECIFICATIONS			
Efficiency			See table
Isolation voltage	Input to Output	1600VDC, min. 1minute	
	Input(Output) to Case	1000VDC, min. 1minute	
Isolation resistance	500VDC	10 ⁹ ohms, min.	
Isolation capacitance		1500pF, max.	
Switching frequency		330kHz±10%	
Design meets safety standard	IEC60950-1, UL60950-1, EN60950-1		
Case material		Copper	
Base material		FR4 PCB	
Potting material		Epoxy (UL94-V0)	
Dimensions		1.0 X 1.0 X 0.39 Inch (25.4 X 25.4 X 9.9mm)	
Weight		16.5g(0.58oz)	
MTBF (Note 1)	BELLCORE TR-NWT-000332	1.756x10 ⁶ hrs	
	MIL-HDBK-217F	1.111x10 ⁶ hrs	

INPUT SPECIFICATIONS			
Input voltage range	24VDC nominal input	9 ~ 36VDC	
	48VDC nominal input	18 ~ 75VDC	
Input surge voltage	24VDC input	50VDC 1sec, max.	
	48VDC input	100VDC 1sec, max.	
Input reflected ripple current		30mA _{p-p}	
Start up time	Nominal input and constant resistive load	Power up Remote ON/OFF	30ms, max.
Start-up voltage	24VDC input	9VDC, max.	
	48VDC input	18VDC, max.	
Shutdown voltage	24VDC input	8VDC	
	48VDC input	16VDC	
Remote ON/OFF (Note 7)			
Positive logic(Optional)	DC-DC ON	Open or 3V < Vr < 15V	
	DC-DC OFF	Short or 0V < Vr < 1.2V	
Negative logic(Standard)	DC-DC ON	Short or 0V < Vr < 1.2V	
	DC-DC OFF	Open or 3V < Vr < 15V	
Input current of Remote control pin	Nominal input	-0.5mA~1.0mA	
Remote off state input current	Nominal input	2.5mA	

ENVIRONMENTAL SPECIFICATIONS			
Operating ambient temperature		-40°C to +85°C (with derating)	
Maximum case temperature		+105°C	
Storage temperature range		-55°C ~ +125°C	
Thermal impedance	Natural convection	16.18 °C/Watt	
(Note 8)	Natural convection with heat-sink	15.13 °C/Watt	
Thermal shock		MIL-STD-810F	
Vibration		MIL-STD-810F	
Relative humidity		5% to 95% RH	

EMC CHARACTERISTICS			
EMI (Note 9)	EN55022		Class A, Class B
ESD	EN61000-4-2	Air Contact	± 8kV ± 6kV Perf. Criteria A
Radiated immunity	EN61000-4-3		10 V/m Perf. Criteria A
Fast transient (Note 10)	EN61000-4-4		± 2kV Perf. Criteria A
Surge (Note 10)	EN61000-4-5		± 1kV Perf. Criteria A
Conducted immunity	EN61000-4-6		3 Vr.m.s Perf. Criteria A


Model Number	Input Range	Output Voltage	Output Current		Output ⁽³⁾⁽⁴⁾ Ripple & Noise	No Load ⁽²⁾ Input Current	Eff ⁽³⁾ (%)	Capacitor ⁽⁵⁾ Load max
			Min. Load	Full Load				
LCD10-24S3P3W	9 ~ 36 VDC	3.3 VDC	0mA	3000mA	40mVp-p	6mA	85	3500μF
LCD10-24S05W	9 ~ 36 VDC	5 VDC	0mA	2000mA	40mVp-p	6mA	87	2500μF
LCD10-24S12W	9 ~ 36 VDC	12 VDC	0mA	830mA	60mVp-p	6mA	90	430μF
LCD10-24S15W	9 ~ 36 VDC	15 VDC	0mA	670mA	60mVp-p	6mA	91	350μF
LCD10-24S24W	9 ~ 36 VDC	24 VDC	0mA	416mA	60mVp-p	6mA	90	125μF
LCD10-24D05W	9 ~ 36 VDC	± 5 VDC	0mA	± 1000mA	40mVp-p	6mA	87	±1440μF
LCD10-24D12W	9 ~ 36 VDC	± 12 VDC	0mA	± 416mA	60mVp-p	6mA	89	± 250μF
LCD10-24D15W	9 ~ 36 VDC	± 15 VDC	0mA	± 333mA	60mVp-p	6mA	89	± 180μF
LCD10-48S3P3W	18 ~ 75 VDC	3.3 VDC	0mA	3000mA	40mVp-p	4mA	85	3500μF
LCD10-48S05W	18 ~ 75 VDC	5 VDC	0mA	2000mA	40mVp-p	4mA	87	2500μF
LCD10-48S12W	18 ~ 75 VDC	12 VDC	0mA	830mA	60mVp-p	4mA	90	430μF
LCD10-48S15W	18 ~ 75 VDC	15 VDC	0mA	670mA	60mVp-p	4mA	90	350μF
LCD10-48S24W	18 ~ 75 VDC	24 VDC	0mA	416mA	60mVp-p	4mA	90	125μF
LCD10-48D05W	18 ~ 75 VDC	± 5 VDC	0mA	± 1000mA	40mVp-p	4mA	87	±1440μF
LCD10-48D12W	18 ~ 75 VDC	± 12 VDC	0mA	± 416mA	60mVp-p	4mA	89	± 250μF
LCD10-48D15W	18 ~ 75 VDC	± 15 VDC	0mA	± 333mA	60mVp-p	4mA	89	± 180μF

Note


- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
- Typical value at nominal input and no load.
- Typical value at nominal input and full load.
- The ripple and noise of output voltage 24VDC is measured with a 1μF/50V X7R 1206 MLCC.
The ripple and noise of other output voltage is measured with a 10μF/25V X7R 1206 MLCC .
- Test by minimum input and constant resistive load.
- Trimming allows the user to increase or decrease the output voltage set point of the module.
This is accomplished by connecting an external resistor between the TRIM pin and either the +OUTPUT pin or the -OUTPUT pin.
- The CTRL pin voltage is reference to -INPUT.
The order number please see product standard table.
- Heat-sink is optional and P/N:7G-0047C-F.
- The LCD10W series standard module meet EN55022 Class A without external components and meet Class B with external components.
For more detail information, please contact with P-DUKE.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220μF/100V.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


LCD10-48S05W Derating Curve

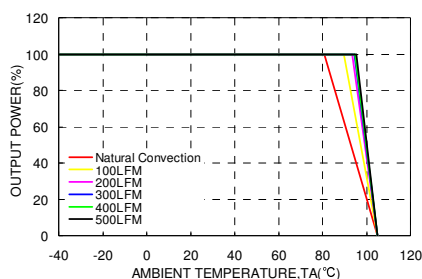


LCD10-48S05W Derating Curve With Heat-sink

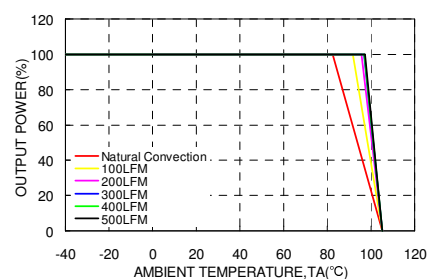


LCD10-48S05W Efficiency VS Input Voltage

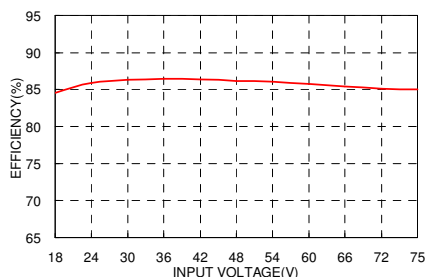

LCD10-48S05W Efficiency VS Output Current

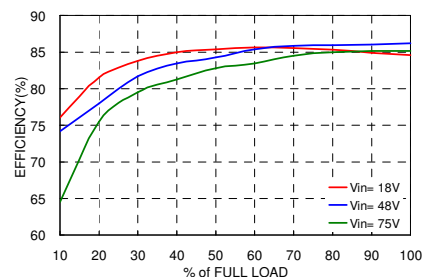

MECHANICAL DRAWING :

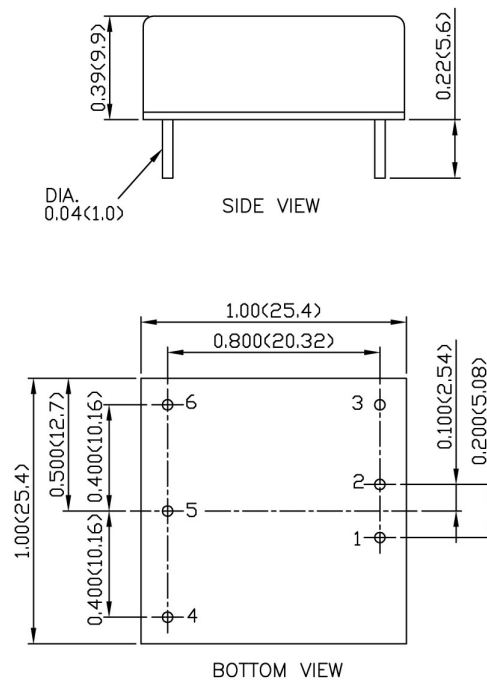

1. All dimensions in Inch (mm)



Tolerance: X.XX±0.02 (X.X±0.5)

X.XXX±0.01 (X.XX±0.25)

2. Pin pitch tolerance ±0.01 (0.25)

3. Pin dimension tolerance ±0.004 (0.1)

PIN CONNECTION		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
3	CTRL	CTRL
4	+OUTPUT	+OUTPUT
5	TRIM	COMMON
6	-OUTPUT	-OUTPUT

EXTERNAL OUTPUT TRIMMING	
Output can be externally trimmed by using the method shown below.	
TRIM UP 	TRIM DOWN 

PRODUCT STANDARD TABLE	
Option	Suffix
Negative logic remote ON/OFF(Standard)	
Positive logic remote ON/OFF	-A
Without CTRL pin	-B
Negative logic remote ON/OFF without TRIM pin	-C
Without CTRL &TRIM pin	-D
Positive logic remote ON/OFF without TRIM pin	-E