

MOP06(W) SERIES

DC-DC CONVERTER
2:1 & 4:1 WIDE INPUT RANGE
UP TO 6 WATTS



FEATURES

- REINFORCED INSULATION FOR 300VAC WORKING VOLTAGE
- CLEARANCE AND CREEPAGE DISTANCE :6.6mm/2MOOP
- 3000VAC INPUT TO OUTPUT 2MOOP ISOLATION
- BUILT-IN EMI CLASS A FILTER
- 2μA PATIENT LEAKAGE CURRENT
- SAFETY MEETS ANSI/AAMI ES60601-1, EN60601-1 AND IEC60601-1
- CE MARK MEETS 2006/95/EC, 2011/95/EC AND 2004/108/EC
- COMPLIANT TO RoHS EU DIRECTIVE 2011/65/EU

APPLICATIONS

MEDICAL EQUIPMENT
TELECOM/DATACOM
INDUSTRY CONTROL SYSTEM
MEASUREMENT EQUIPMENT
SEMICONDUCTOR EQUIPMENT
PV POWER SYSTEM
IGBT GATE DRIVER

3000VAC ISOLATION	UVP	OCP	SCP	OVP	LOW STANDBY POWER
----------------------	-----	-----	-----	-----	-------------------------

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
MOP06-05S3P3A/B	4.5 ~ 9	3.3	1800	10	81.5	2100
MOP06-05S05A/B	4.5 ~ 9	5	1200	10	86	1500
MOP06-05S12A/B	4.5 ~ 9	12	500	15	86	260
MOP06-05S15A/B	4.5 ~ 9	15	400	15	86	210
MOP06-05S24A/B	4.5 ~ 9	24	250	20	87	75
MOP06-05D05A/B	4.5 ~ 9	±5	±600	25	84	± 860
MOP06-05D12A/B	4.5 ~ 9	±12	±250	25	86.5	± 150
MOP06-05D15A/B	4.5 ~ 9	±15	±200	25	87.5	± 110
MOP06-12S3P3A/B	9 ~ 18	3.3	1800	10	83.5	2100
MOP06-12S05A/B	9 ~ 18	5	1200	10	86	1500
MOP06-12S12A/B	9 ~ 18	12	500	10	89	260
MOP06-12S15A/B	9 ~ 18	15	400	10	89	210
MOP06-12S24A/B	9 ~ 18	24	250	10	88.5	75
MOP06-12D05A/B	9 ~ 18	±5	±600	10	84	± 860
MOP06-12D12A/B	9 ~ 18	±12	±250	10	89	± 150
MOP06-12D15A/B	9 ~ 18	±15	±200	10	88	± 110
MOP06-24S3P3A/B	18 ~ 36	3.3	1800	6	83	2100
MOP06-24S05A/B	18 ~ 36	5	1200	6	86.0	1500
MOP06-24S12A/B	18 ~ 36	12	500	6	89	260
MOP06-24S15A/B	18 ~ 36	15	400	6	89	210
MOP06-24S24A/B	18 ~ 36	24	250	6	88.5	75
MOP06-24D05A/B	18 ~ 36	±5	±600	6	85	± 860
MOP06-24D12A/B	18 ~ 36	±12	±250	6	88.5	± 150
MOP06-24D15A/B	18 ~ 36	±15	±200	6	88	± 110
MOP06-48S3P3A/B	36 ~ 75	3.3	1800	4	82.5	2100
MOP06-48S05A/B	36 ~ 75	5	1200	4	86.5	1500
MOP06-48S12A/B	36 ~ 75	12	500	4	88	260
MOP06-48S15A/B	36 ~ 75	15	400	4	88.5	210
MOP06-48S24A/B	36 ~ 75	24	250	4	88	75
MOP06-48D05A/B	36 ~ 75	±5	±600	4	85	± 860
MOP06-48D12A/B	36 ~ 75	±12	±250	4	88	± 150
MOP06-48D15A/B	36 ~ 75	±15	±200	4	88	± 110

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
MOP06-24S3P3WA/B	9 ~ 36	3.3	1800	6	83	2100
MOP06-24S05WA/B	9 ~ 36	5	1200	6	86.0	1500
MOP06-24S12WA/B	9 ~ 36	12	500	6	89	260
MOP06-24S15WA/B	9 ~ 36	15	400	6	89	210
MOP06-24S24WA/B	9 ~ 36	24	250	6	88.5	75
MOP06-24D05WA/B	9 ~ 36	±5	±600	6	85	± 860
MOP06-24D12WA/B	9 ~ 36	±12	±250	6	88.5	± 150
MOP06-24D15WA/B	9 ~ 36	±15	±200	6	88	± 110
MOP06-48S3P3WA/B	18 ~ 75	3.3	1800	4	82.5	2100
MOP06-48S05WA/B	18 ~ 75	5	1200	4	86.5	1500
MOP06-48S12WA/B	18 ~ 75	12	500	4	88	260
MOP06-48S15WA/B	18 ~ 75	15	400	4	88.5	210
MOP06-48S24WA/B	18 ~ 75	24	250	4	88	75
MOP06-48D05WA/B	18 ~ 75	±5	±600	4	85	± 860
MOP06-48D12WA/B	18 ~ 75	±12	±250	4	88	± 150
MOP06-48D15WA/B	18 ~ 75	±15	±200	4	88	± 110

PART NUMBER STRUCTURE

MOP06	-	48	S	05	W	A	-	P	T
Series name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range	Pin Connection Option		Remote On/Off Option	Trim Option
		05: 4.5~9 12: 9~18 24: 18~36 48: 36~75	S: Single	3P3: 3.3 05: 5V 12: 12 15: 15 24: 24	□: 2:1 W: 4:1	A: A type(Standard) B: B type		□: No On/Off control P: Remote On/Off (Only for B type Pin connection)	□: No Trim T: Trim (Only for B type Pin connection)
		W: 24: 9~36 48: 18~75	D: Dual	05: ±5 12: ±12 15: ±15					

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	2:1 5Vin(nom) 12Vin(nom) 24Vin(nom) 48Vin(nom)	4.5 9 18 36	5 12 24 48	9 18 36 75	VDC
	(W) 4:1 24Vin(nom) 48Vin(nom)	9 18	24 48	36 75	VDC
Start-up voltage	2:1 5Vin(nom) 12Vin(nom) 24Vin(nom) 48Vin(nom)			4.5 9 18 36	VDC
	(W) 4:1 24Vin(nom) 48 Vin(nom)			9 18	VDC
Shutdown voltage	2:1 5Vin(nom) 12Vin(nom) 24Vin(nom) 48Vin(nom)		4 8 16 33		VDC
	(W) 4:1 24Vin(nom) 48Vin(nom)		8 16		VDC
Start up time	Constant resistive load Power up Remote ON/OFF		30 30		ms
Input surge voltage	3 second, max. 2:1 5Vin(nom) 12Vin(nom) 24Vin(nom) 48Vin(nom)			16 25 50 100	VDC
	3 second, max. (W) 4:1 24Vin(nom) 48Vin(nom)			50 100	VDC
Input filter				Pi type	
Remote ON/OFF (Only for B-type Pin connection option)	Referenced to - INPUT pin DC-DC ON DC-DC OFF Input current of CTRL pin Remote off input current			OPEN or 0 ~ 1.2VDC 2.2 ~ 12VDC 1 2.5	mA mA

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
	Single Dual	-0.5		+0.5	%
Load regulation	No Load to Full Load	-0.2		+0.2	%
	Single Dual	-1.0		+1.0	%
Cross regulation	Asymmetrical load 25%/100% FL	-5.0		+5.0	%
Voltage adjustability	Single output	3.3Vout, 5Vout, 12Vout		+10	%
(Only for B-type Pin connection option)		15Vout, 24Vout		+20	%
	Dual output	±5Vout, ±12Vout, ±15Vout		+10	%
Ripple and noise	Measured by 20MHz bandwidth With a 10μF/25V X7R MLCC		30 40 50		mVp-p
	With a 4.7μF/50V X7R MLCC				
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		μs
Over voltage protection	3.3Vout 5Vout 12Vout 15Vout 24Vout	3.7 5.6 13.5 18.3 29.1		5.4 7.0 19.6 22.0 32.5	VDC
	Continuous clamp				
Over load protection	% of Iout rated; Hiccup mode		150		%
Short circuit protection					Continuous, automatic recovery

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	3000			VAC
Isolation capacitance	Input to Output		12	17	pF
Leakage current	240VAC, 60Hz			2	μA
Switching frequency		225	250	275	kHz
Clearance/Creepage		6.6			mm
Design meet safety standard					ANSI/AAMI ES60601-1 IEC60601-1, EN60601-1
Case material					Non-conductive black plastic
Base material					Non-conductive black plastic
Potting material					Silicone (UL94-V0)
Dimensions					1.25 X 0.80 X 0.40 Inch (31.8×20.3×10.2 mm)
Weight					14g (0.48oz)
MTBF	MIL-HDBK-217F Ta=25°C, Full load				4.718 x 10 ⁶ hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating	-40		+88	°C
	With derating	+88		+105	°C
Storage temperature range		-55		+125	°C
Thermal impedance	Natural convection (20LFM)		18		°C/W
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI ⁽¹⁾	EN55011, EN55022 and FCC Part 18	Class A, Class B
ESD	EN61000-4-2 Air ± 8kV Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient ⁽²⁾	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge ⁽²⁾	EN61000-4-5 ± 2kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A

Note:


- The MOP06 (W) series can meet EMI Class A with no external filter. And Class B only with external components. For more detail information, please contact with P-DUKE.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The MOP06-05S□□□□ recommended an aluminum electrolytic capacitor (Nippon Chemi-con KY series, 1000μF/25V).
And a reverse diode (Vishay V10P45) to connect in parallel.
The MOP06-12&24S□□□□□ recommended an aluminum electrolytic capacitor (Nippon Chemi-con KY series, 470μF/50V).
The MOP06-48S□□□□□ recommended an aluminum electrolytic capacitor (Nippon Chemi-con KY series, 330μF/100V).

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

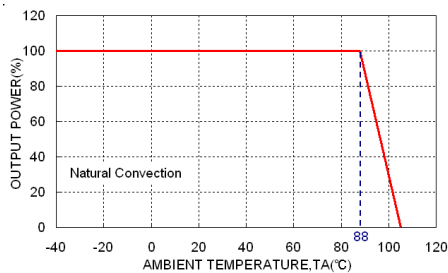

MOP06-48S05WA Derating Curve

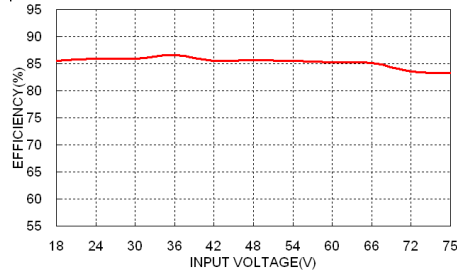


MOP06-48S05WA Efficiency VS Input Voltage

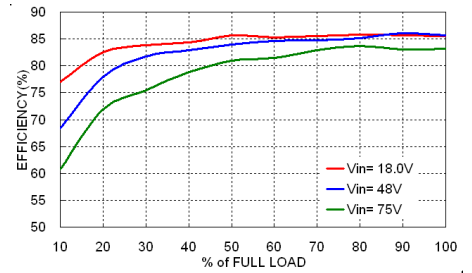

MOP06-48S05WA Efficiency VS Output Load

MECHANICAL DRAWING


A type Pin connection (Standard)

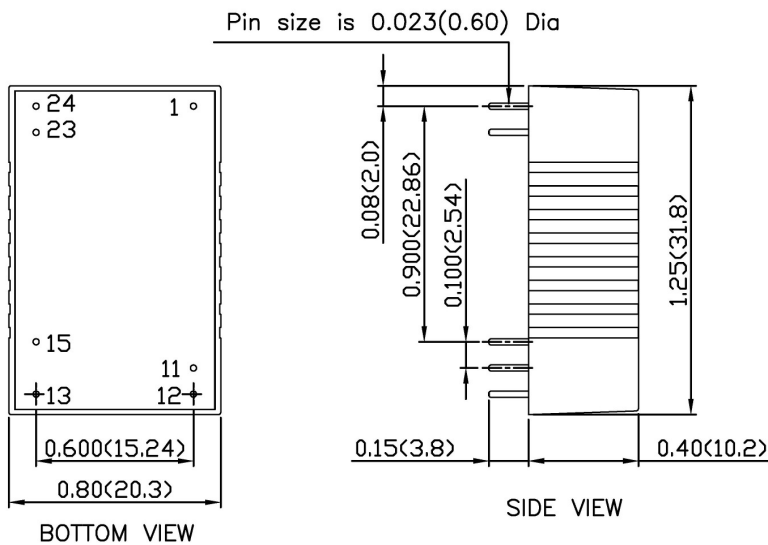

DIP PIN CONNECTION		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
11	NO PIN	COMMON
12	-OUTPUT	NO PIN
13	+OUTPUT	-OUTPUT
15	NO PIN	+OUTPUT
23	- INPUT	- INPUT
24	- INPUT	- INPUT

- All dimensions in Inch (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01 (0.25)
- Pin dimension tolerance ±0.004 (0.1)

B type Pin connection

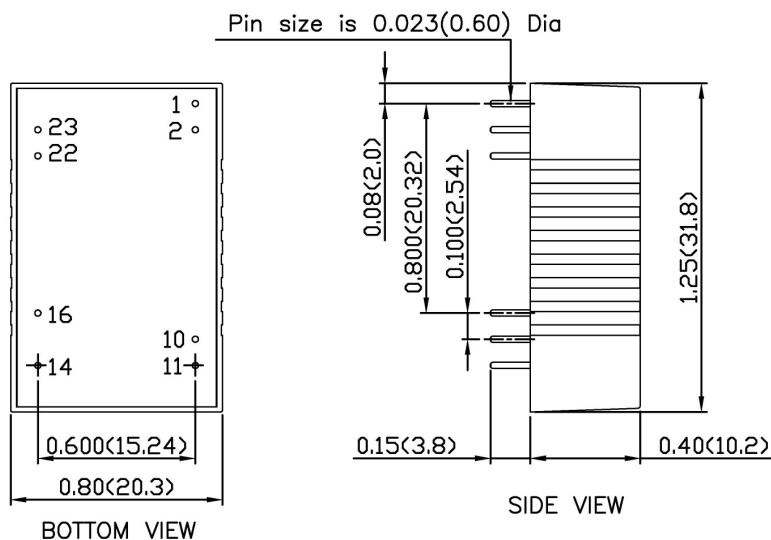

DIP PIN CONNECTION		
PIN	SINGLE	DUAL
1	CTRL (Option)	CTRL (Option)
2	- INPUT	- INPUT
10	TRIM (Option)	TRIM (Option)
11	NO PIN / NC (* *)	-OUTPUT
14	+OUTPUT	+OUTPUT
16	-OUTPUT	COMMON
22	+INPUT	+INPUT
23	+INPUT	+INPUT

* * : The Pin 11 is "NO PIN" when single output with Trim option (Suffix: -T).
The Pin 11 is "NC" when single output without TRIM pin.

- All dimensions in Inch (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01 (0.25)
- Pin dimension tolerance ±0.004 (0.1)