



NSR01 SERIES

NON-ISOLATION DC-DC CONVERTER

4.6~36VDC WIDE INPUT RANGE



STANDARD
VERTICAL MOUNTING



SUFFIX -A
HORIZONTAL MOUNTING



FEATURES

- PIN_OUT COMPATIBLE WITH LM78XX LINEAR REGULATORS
- NO MINIMUM LOAD REQUIRED
- SMALL SIZE AND LOW PROFILE: 0.46 X 0.30 X 0.40 INCH
- NEGATIVE OUTPUT APPLICATION
- LOW STANDBY POWER CONSUMPTION
- SAFETY MEETS UL60950-1, EN60950-1, IEC60950-1 AND EN50155
- CE MARK MEETS 2006/95/EC, 2011/95/EC and 2004/108/EC
- COMPLIANT TO ROHS EU DIRECTIVE 2011/65/EU

APPLICATIONS

- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- DISTRIBUTED POWER ARCHITECTURES
- SEMICONDUCTOR EQUIPMENT
- MICROPROCESSOR POWER APPLICATION

NON ISOLATION	OCP	SCP	OTP	LOW STANDBY POWER
--------------------------	------------	------------	------------	----------------------------------

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Positive output application

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load A	Input Current @ No Load mA	Efficiency		Maximum Capacitor Load µF
					Min. Vin %	Max. Vin	
NSR01-12S1P5	4.6 ~ 36	1.5	1	1.0	77.0	66.5	470
NSR01-12S1P8	4.6 ~ 36	1.8		1.0	80.5	70.0	
NSR01-12S2P5	4.6 ~ 36	2.5		1.0	83.5	75.5	
NSR01-12S3P0	4.6 ~ 36	3.0		1.5	86.5	78.5	
NSR01-12S3P3	4.6 ~ 36	3.3		1.5	87.5	79.5	
NSR01-12S05	6.5 ~ 36	5.0		2.5	91.5	83.0	
NSR01-12S6P5	8.0 ~ 36	6.5		3.0	93.0	86.0	
NSR01-12S09	10.5 ~ 36	9.0		3.5	94.5	88.5	
NSR01-24S12	13.5 ~ 36	12		2.5	95.0	91.5	
NSR01-24S15	16.5 ~ 36	15		3.5	95.5	92.5	

Negative output application

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load A	Input Current @ No Load mA	Efficiency		Maximum Capacitor Load µF
					Min. Vin %	Max. Vin	
NSR01-12S1P5	4.6 ~ 32	-1.5	-0.6	1.0	69.5	64.5	470
NSR01-12S1P8	4.6 ~ 32	-1.8	-0.6	1.0	72.0	67.5	
NSR01-12S2P5	4.6 ~ 32	-2.5	-0.6	1.0	72.0	74.0	
NSR01-12S3P0	4.6 ~ 32	-3.0	-0.6	2.0	73.0	76.5	
NSR01-12S3P3	4.6 ~ 32	-3.3	-0.6	2.0	74.0	77.5	
NSR01-12S05	4.6 ~ 31	-5.0	-0.4	3.0	79.5	78.5	
NSR01-12S6P5	7.0 ~ 29	-6.5	-0.3	4.0	84.5	80.0	
NSR01-12S09	7.0 ~ 27	-9.0	-0.3	7.0	85.0	82.0	
NSR01-24S12	7.0 ~ 24	-12	-0.3	8.0	85.0	85.5	
NSR01-24S15	7.0 ~ 21	-15	-0.2	10	85.5	84.5	

PART NUMBER STRUCTURE

NSR01 - 12 S 05 - A

Series Name Input Voltage (VDC) Output Quantity Output Voltage (VDC) Mounting Options

See table S:Single See table □:Vertical Mounting
A:Horizontal Mounting

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	Positive application	4.6		36	VDC
	Negative application	4.6		32	
Start up time	Constant resistive load		5		ms
Rise time	Time for Vout rises from 10% to 90% of Vout		3.5		ms
Input filter					Capacitor type
Input reflected ripple current			100		mAp-p

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Voltage accuracy		-2.0		+2.0	%	
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%	
Load regulation	10% to 100% of Full Load	Vertical mounting	1.5Vout	-0.6	+0.6	%
			Others	-0.4	+0.4	
	Horizontal mounting	1.5Vout, 1.8Vout	-1.2	+1.2	%	
		Others	-0.4	+0.4		
Ripple and noise	Measured by 20MHz bandwidth		50		mVp-p	
			75			
Temperature coefficient		-0.015		+0.015	%/°C	
Dynamic load response	50% load step change	Peak deviation	150		mV	
		Recovery time	250		µs	
Output start-up overshoot				+1	%	
Over load protection			2		A	
Short circuit protection					Continuous, automatic recovery	

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching frequency	Vout ≤ 3.3VDC	270	300	330	kHz
	Vout ≥ 5.0VDC	520	580	640	
Design meet safety standard		IEC60950-1, UL60950-1, EN60950-1			
Case material		Non-conducted black plastic			
Potting material		Silicone (UL94-V0)			
Weight		1.9g (0.07oz)			
MTBF	MIL-HDBK-217F, Full load	2.009 x 10 ⁷ hrs			

ENVIRONMENTAL SPECIFICATIONS



Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+85	°C
Over temperature protection	Internal IC junction		+170		°C
Storage temperature range		-55		+125	°C
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH

CAUTION: This power module is not internally fused. An input line fuse must always be used.

APPLICATION CIRCUIT







Positive application

Negative application

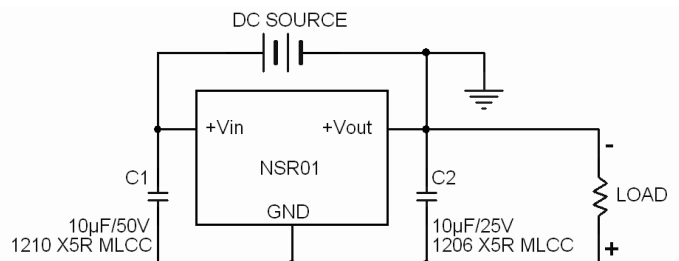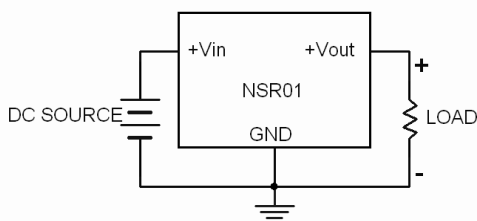

C1 and C2 are required that should be fitted close to the converter's pins. Maximum capacitive load including C2 is 470µF.



CHARACTERISTIC CURVE

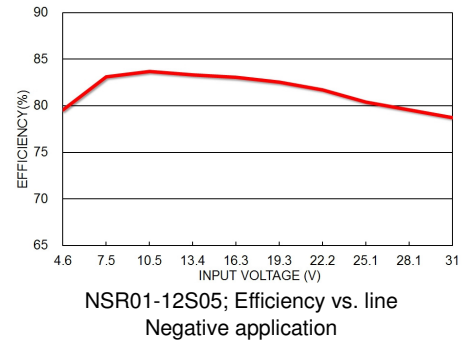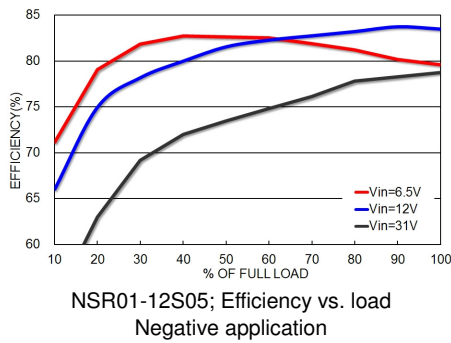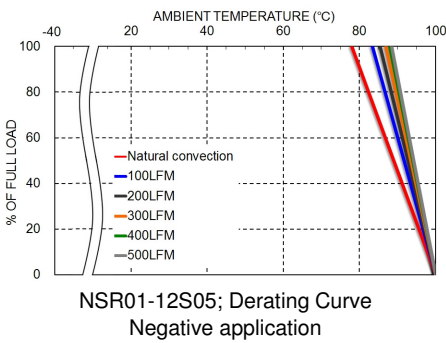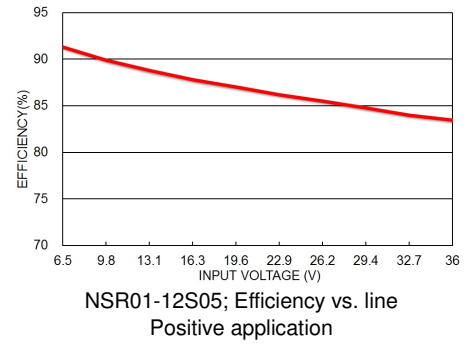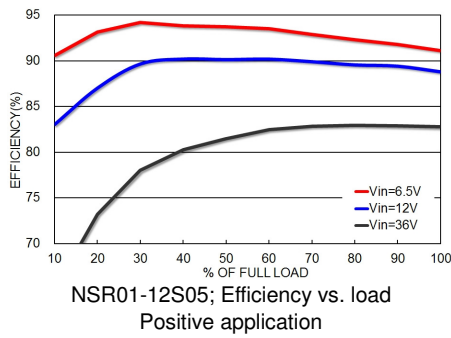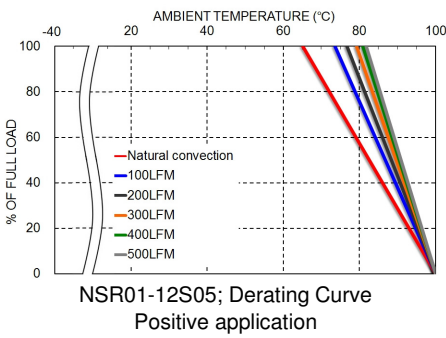

MECHANICAL DRAWING

Standard type: Vertical mounting

Suffix-A: Horizontal mounting

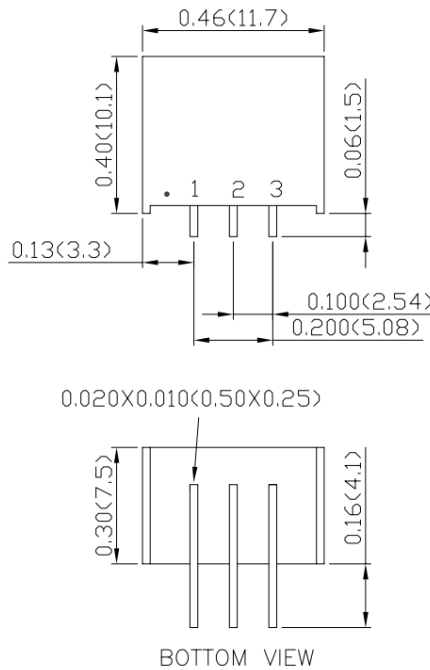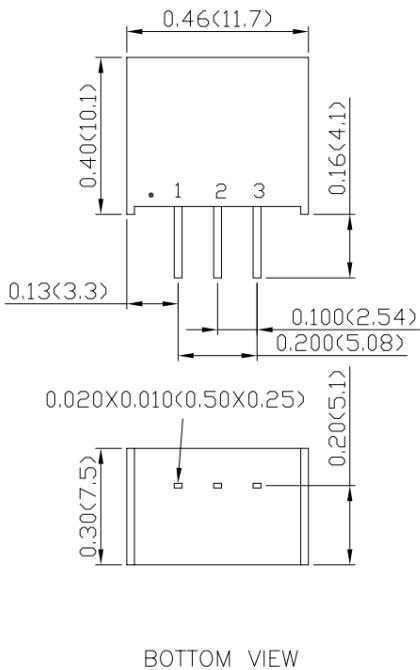

PIN CONNECTION

PIN	DEFINE
1	+Vin
2	GND
3	+Vout

1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)
x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004(0.1)