

KEY FEATURES

- Din Rail Switching Power Supply
- Universal Input Range 90-264VAC, 47-440 Hz
- Regulated Output
- Low Ripple and Noise
- High Efficiency
- CE, UL, Approval
- 2-Years Product Warranty




ELECTRICAL SPECIFICATIONS

Model No.		AHC-3.3S-DN	AHC-5S-DN	AHC-12S-DN	AHC-15S-DN	AHC-24S-DN
Max Output Wattage (W)		4.125W	5W	5W	5W	5.5W
Input	Voltage	90-264 VAC or 120-370 VDC				
	Frequency (Hz)	47-440 Hz				
	Current (Full load)	110 mA max. (115 VAC) / 70 mA max. (230 VAC)				
	Inrush Current (<2ms)	10 A max. (115 VAC) / 20 A max. (230 VAC)				
	Leakage Current	0.75 mA max.				
Output	Voltage (V.DC.)	3.3V	5V	12V	15V	24V
	Voltage Accuracy	±2%				
	Current (mA) max	1250	1000	420	333	230
	Line Regulation (LL-HL) (typ.)	±0.3%.				
	Load Regulation (5-100%) (typ.)	±0.5%.				
	Minimum Load	0%				
	Maximum Capacitive Load	470-23,000µF depending on model				
	Ripple	<0.2% Vout +40mV max (Vp-p)				
	Noise	<0.5% Vout +50mV max (Vp-p)				
	Efficiency	64%	66%	72%	72%	71%
	Hold-up Time	15 ms min.				
	Switching Frequency	132 kHz				
Protection	Over Power Protection	Hiccup technique, auto-recovery				
	Over Voltage Protection	Zener diode clamp				
	Short Circuit Protection	Hiccup mode, indefinite (automatic recovery)				
Isolation	Input-Output (V.AC)	3000V				
Environment	Operating Temperature	-25°C...+70°C (with derating)				
	Storage Temperature	-40°C...+85°C				
	Temperature Coefficient	±0.02%/°C				
	Humidity	95% RH				
	MTBF	>360,000 h @ 25°C (MIL-HDBK-217F)				
Physical	Dimension (L x W x H)	1.38 x 3.11 x 1.692 Inches (35.0 x 79.0 x 43.0 mm) Tolerance ±0.5 mm				
	Case Material	Plastic resin with Fiberglass (flammability to UL 94V-2)				
	Weight	67 g				
	Cooling Method	Free air convection				
Safety	Agency Approvals	UL/cUL, CE, TUV				
EMC	EMI (Conducted & Radiated Emission)	EN 55022 class B				
	EMS (Noise Immunity)	EN 55024				


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

MECHANICAL DIMENSION (Top View)

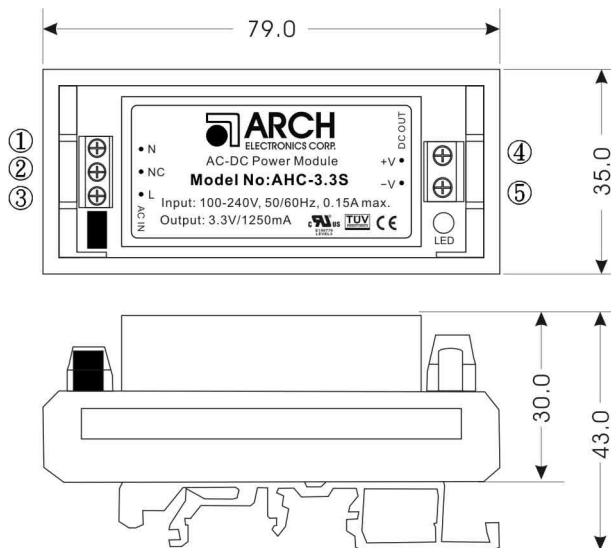

PIN#	SINGLE
1	AC IN (N)
2	DO NOT CONNECT
3	AC IN (L)
4	+DC OUT
5	-DC OUT

DERATING

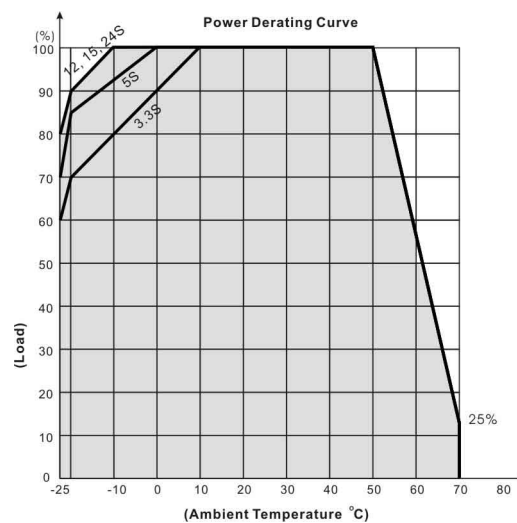

BLOCK DIAGRAM

Single Output

