

FED40W SERIES

DC-DC CONVERTER

4:1 WIDE INPUT RANGE
UP TO 40Watts



FEATURES

- NO MINIMUM LOAD REQUIRED
- LOW STANDBY POWER CONSUMPTION
- 1600VDC INPUT TO OUTPUT ISOLATION
- SIX-SIDED CONTINUOUS SHIELD
- STANDARD 2.00 X 1.00 X 0.40 INCH
- SAFETY MEETS UL60950-1, EN60950-1 IEC60950-1 AND EN50155
- CE MARK MEETS 2006/95/EC, 2011/95/EC and 2004/108/EC
- COMPLIANT TO RoHS EU DIRECTIVE 2011/65/EU

APPLICATIONS

RAILWAY SYSTEM
WIRELESS NETWORK
TELECOM/DATACOM
INDUSTRY CONTROL SYSTEM
DISTRIBUTED POWER ARCHITECTURES
SEMICONDUCTOR EQUIPMENT

1600VDC ISOLATION	REMOTE CONTROL	UVP	OCP	SCP	OVP	OTP	LOW STANDBY POWER
-------------------	----------------	-----	-----	-----	-----	-----	-------------------

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	µF
FED40-24S3P3W	9 ~ 36	3.3	10000	15	90	26600
FED40-24S05W	9 ~ 36	5	8000	15	91	20000
FED40-24S12W	9 ~ 36	12	3333	15	92	3900
FED40-24S15W	9 ~ 36	15	2666	15	92	2600
FED40-24S24W	9 ~ 36	24	1666	15	91	1300
FED40-24D12W	9 ~ 36	±12	±1666	15	90	± 2600
FED40-24D15W	9 ~ 36	±15	±1333	15	90	± 1600
FED40-24D24W	9 ~ 36	±24	±833	15	91	±650
FED40-48S3P3W	18 ~ 75	3.3	10000	10	90	26600
FED40-48S05W	18 ~ 75	5	8000	10	91	20000
FED40-48S12W	18 ~ 75	12	3333	10	92	3900
FED40-48S15W	18 ~ 75	15	2666	10	92	2600
FED40-48S24W	18 ~ 75	24	1666	10	91	1300
FED40-48D12W	18 ~ 75	±12	±1666	10	90	± 2600
FED40-48D15W	18 ~ 75	±15	±1333	10	90	± 1600
FED40-48D24W	18 ~ 75	±24	±833	10	91	±650
FED40-110S3P3W	43 ~ 160	3.3	10000	10	88	26600
FED40-110S05W	43 ~ 160	5	8000	10	89	20000
FED40-110S12W	43 ~ 160	12	3333	10	90.5	3900
FED40-110S15W	43 ~ 160	15	2666	10	91	2600
FED40-110S24W	43 ~ 160	24	1666	10	90	1300
FED40-110D12W	43 ~ 160	±12	±1666	10	89	± 2600
FED40-110D15W	43 ~ 160	±15	±1333	10	89	± 1600
FED40-110D24W	43 ~ 160	±24	±833	10	91	±650

PART NUMBER STRUCTURE

FED40	-	48	S	05	W	-	N	HS
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Remote Control options	Heat-sink
		24: 9~36 48: 18~75 110: 43~160	S: Single D: Dual	3P3: 3.3 05: 5 12: 12 15: 15 24: 24 12: ±12 15: ±15 24: ±24	4:1		□: Positive logic N: Negative logic	□: No Heat-sink HS Heat-sink HC Heat-sink with Clamp

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom)	9	24	36	VDC
	48Vin(nom)	18	48	75	
	110Vin(nom)	43	110	160	
Start-up voltage	24Vin(nom)			9	VDC
	48Vin(nom)			18	
	110Vin(nom)			43	
Shutdown voltage	24Vin(nom)		8		VDC
	48Vin(nom)		16		
	110Vin(nom)		40		
Start up time	Constant resistive load Power up Remote ON/OFF		60 60		ms
Input surge voltage	1 second, max.	24Vin(nom)		50	VDC
		48Vin(nom)		100	
		110Vin(nom)		170	
Input filter			Pi type		
Remote ON/OFF	Referenced to -INPUT pin	Positive logic (Standard)	DC-DC ON DC-DC OFF	Open or 3 ~ 12VDC Short or 0 ~ 1.2VDC	
		Negative logic (Option)	DC-DC ON DC-DC OFF	Short or 0 ~ 1.2VDC Open or 3 ~ 12VDC	
		Input current of CTRL pin Remote off input current		-0.5 3	0.5 mA mA

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
Load regulation	No Load to Full Load	Single		+0.5	%
		Dual		+1.0	
Cross regulation	Asymmetrical load 25%/100% FL	-5.0		+5.0	%
Voltage adjustability	Single output	3.3Vout, 5Vout, 12Vout		+10	%
		15Vout, 24Vout		+20	
Ripple and noise	Measured by 20MHz bandwidth With a 0.1µF/50V X7R MLCC	3.3Vout, 5Vout	75	100	mVp-p
		12Vout, 15Vout	100	125	
		24Vout	150	200	
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		µs
Over voltage protection	Zener diode clamp	3.3Vout	3.9		VDC
		5Vout	6.2		
		12Vout	15		
		15Vout	20		
Over load protection	% of Iout rated; Hiccup mode		150		%
Short circuit protection			Continuous, automatic recovery		

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	1600		VDC
		Input (Output) to Case	1600		
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				1500	pF
Switching frequency		225	250	275	kHz
Design meet safety standard		IEC60950-1, UL60950-1, EN60950-1 EN50155			
Case material					Copper
Base material					FR4 PCB
Potting material					Silicone (UL94-V0)
Dimensions					2.00 X 1.00 X 0.40 Inch (50.8×25.4×10.2 mm)
Weight					32g (1.13oz)
MTBF	MIL-HDBK-217F Ta=25°C, Full load.				9.073 x 10 ⁵ hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature		-40		+85	°C
Maximum case temperature				+105	°C
Over temperature protection			+115		°C
Storage temperature range		-55		+125	°C
Thermal impedance ⁽¹⁾	Natural convection (20LFM) Without Heat-sink With Heat-sink		10.8 10.3		°C/W
Thermal shock					EN61373, MIL-STD-810F
Vibration					EN61373, MIL-STD-810F
Relative humidity					5% to 95% RH

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI ⁽²⁾	EN55011,EN55022	Class A
ESD	EN61000-4-2 Air ± 8kV Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 20 V/m	Perf. Criteria A
Fast transient ⁽³⁾	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge ⁽³⁾	EN61000-4-5 ± 2kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A

Note:


- The heat-sink is optional and P/N: 7G-0020C-F.
- The FED40 series standard module meets EN55022 Class A and Class B with external components. For more detail information, please contact with P-DUKE.
- An external filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The FED40-24□□□W recommended an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V) and a TVS (SMDJ58A, 58V, 3000Watt peak pulse power) to connect in parallel. The FED40-48□□□W recommended an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V) and a TVS (SMDJ120A, 120V, 3000Watt peak pulse power) to connect in parallel. The FED40-110□□□W recommended an aluminum electrolytic capacitor (Ruby-con BXF series, 68µF/200V 3pcs in parallel) and a TVS (SMDJ90A, 90V, 3000Watt peak pulse power 2pcs in series connection) to connect in parallel

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

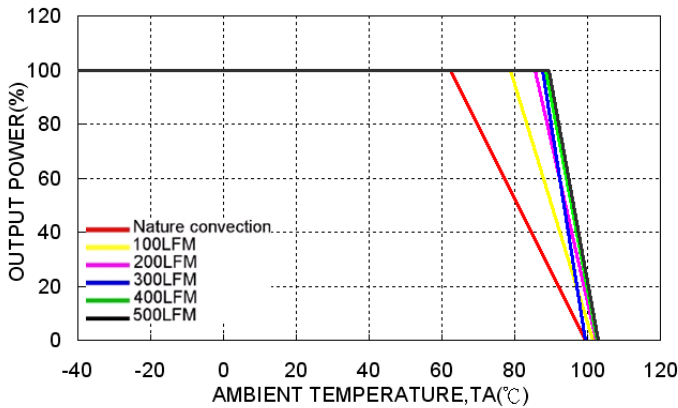


FED40-48S05W Derating Curve

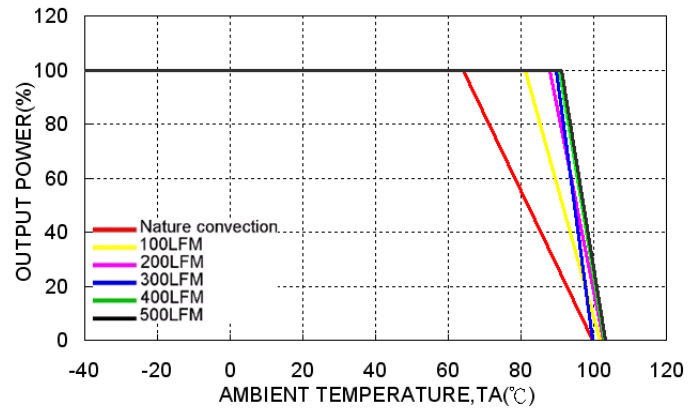

FED40-48S05W Derating Curve with Heat-sink

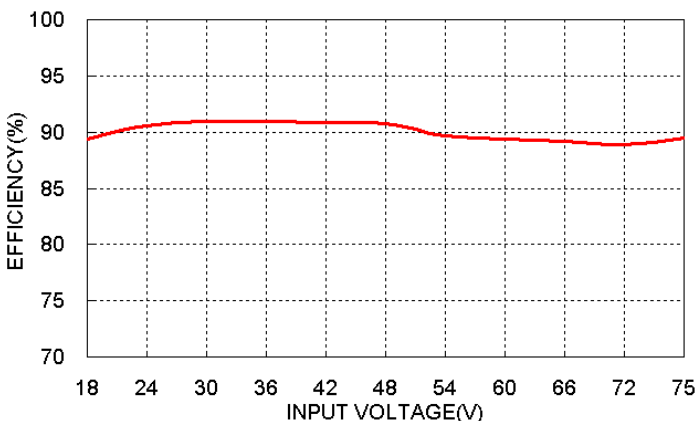


FED40-48S05W Efficiency VS Input Voltage

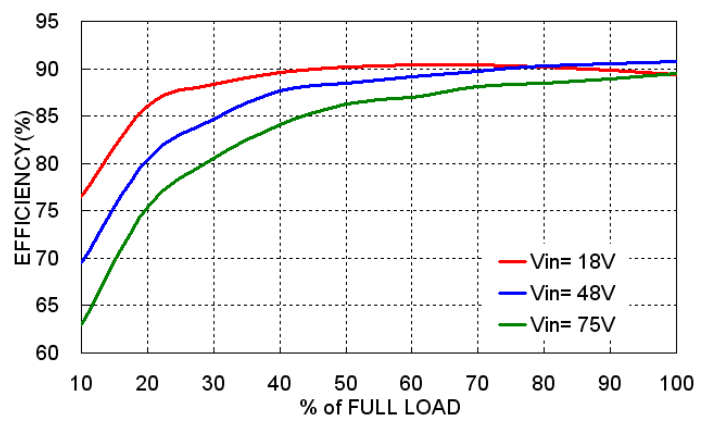


FED40-48S05W Efficiency VS Output Load

MECHANICAL DRAWING

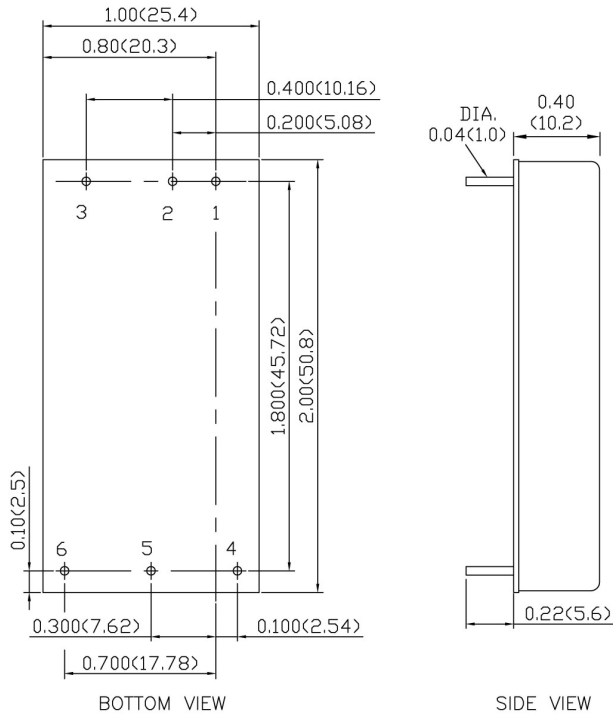

PIN CONNECTION		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
3	CTRL	CTRL
4	+ OUTPUT	+ OUTPUT
5	- OUTPUT	COMMON
6	TRIM	- OUTPUT

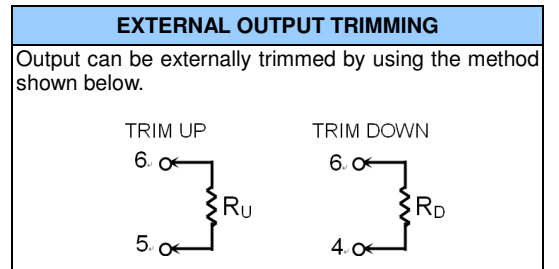

1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)
x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004(0.1)